

TA50/55/60



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
ARTICULATING TELESCOPIC
AERIAL DEVICE

TA50/55/60

FEATURES

- Working Height up to 64.8 ft and Side Reach up to 40.1 ft
- 600 lb Platform Capacity Regardless of Jib Capacity
- 4-Function Single Handle Upper Control
- Altec ISO-Grip® Control System
- Fiberglass Upper Boom & Lower Boom Insulator
- Insulated Aerial Device
- Continuous Rotation
- Articulating Arm Provides Upper Boom Compensation
- Hydraulic Platform Rotation and Tilt
- Full Pressure, Open Center Hydraulic System
- A-Frame Primary Outriggers
- Outrigger Motion Alarm and Outrigger Interlocks
- Two Sets of Hydraulic Tool Circuits at Platform
- Diagnostic Pressure Test Quick Disconnect Couplings
- Emergency Stop Valves at All Upper and Lower Control Stations
- Lower Boom Lifting Eye

OPTIONS

- Rear or Behind Cab Mount
- Altec ARM System
- Hydraulic Extend Jib
- 2-Man Platform with 180° Rotation
- Engine Start/Stop
- Remote Secondary Stowage
- Jib Adapter
- Phase Lifting Jib Attachment
- Auxiliary Outriggers
- Manual Throttle
- Platform Covers
- Intensifier at Boom Tip
- Tool Circuit Below Rotation
- Platform Elevator
- Lanyard Detection System Available on Select Platform Configurations


Recommended safety equipment, available through Altec Supply, include a platform liner, fall protection system, wheel chocks and outrigger pads.

CONFIGURATIONS

CONFIGURATIONS		TA50	TA55	TA60
SPECIFICATIONS	Ground to Bottom of Platform*	49.5 ft (15.1 m)	54.4 ft (16.6 m)	59.8 ft (18.2 m)
	Working Height*	54.5 ft (16.6 m)	59.4 ft (18.1 m)	64.8 ft (19.8 m)
	Maximum Side Reach at Platform Height	36.2 ft (11.0 m) 19.9 ft (6.1 m)	38.3 ft (11.7 m) 22.7 ft (6.9 m)	40.1 ft (12.2 m) 26.6 ft (8.1 m)
	Stowed Travel Height*	11.9 ft (3.6 m)	11.4 ft (3.5 m)	
	Platform Capacity, Single 2-man	600 lb (272.2 kg)		
	Upper Boom Articulation	-25° to 75°		
	Articulating Arm Articulation	5.25° to 92.5°	0° to 92.5°	
	Rotation	Continuous		
*Based on a 40 in (1016 mm) chassis frame height.				



REACH DIAGRAM

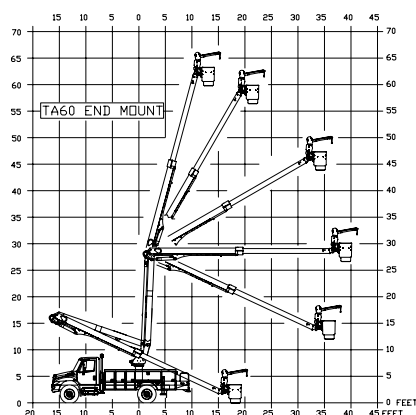

OPTIONAL ALTEC ARM SYSTEM

PROVIDES THE UNIQUE ABILITY TO HANDLE MATERIAL ON EITHER SIDE OF THE BOOM TIP



PLATFORM ELEVATOR

OPTIONAL 24 INCH PLATFORM ELEVATOR ALLOWS FOR EASY ADJUSTMENT OF PLATFORM POSITION



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission. © 2021 Altec Inc. All Rights Reserved. AITA505560-321-v2-r3



NEW EQUIPMENT SALES

800.958.2555

SALES@ALTEC.COM

ALTEC.COM