

AA/AN67(E)-E100



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
NON-OVERCENTER
ELEVATOR


AA/AN67(E)-E100

FEATURES


- Altec ISO-Grip® Control System with Separate Elevator Control
- Hydraulic Platform Rotators
- Two Sets of Hydraulic Tool Circuits at Platform
- Lower Boom Overstow Protection System
- Atmospheric Vent Test Manifold with Quick Disconnects at Platform
- Diagnostic Pressure Test Quick Disconnect Couplings
- Pilot Pressure System
- Outrigger Boom Interlock System
- Outrigger Motion Alarm
- Electric/Hydraulic Outrigger Controls
- Emergency Stop Valves at all Upper and Lower Control Stations
- Available Material Handling
- Lightweight Elevator Design for Optimal Payload Capacity
- Platform Leveling System - Chain and Rod in Lower and Upper Booms

REACH DIAGRAM

AA/AN67-E100

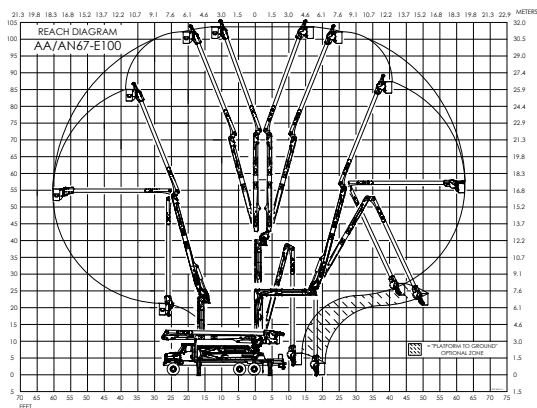

AA/AN67E-E100

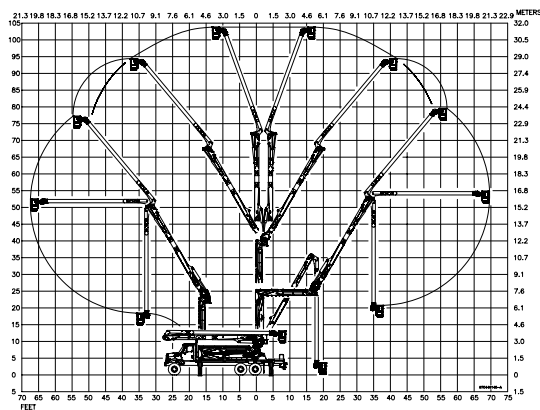

Recommended safety equipment, available through Altec Supply, include a fall protection system and wheel chocks for stationary set-ups.

OPTIONS

- Single 2-man 24 x 48 in (609.6 x 1219.2 mm) 180° Rotating Platform (Personnel Only)
- Single 2-man 24 x 48 in (609.6 x 1219.2 mm) 90° Rotating Platform with Side Mounted Material Handling Jib
- Automatic Upper Boom Stow
- Elevator Stow Protection
- Category A EHV Package
- Category A Pre-wire for Later Addition of EHV Package
- Aluminum Walkway for Upper Boom Access (for Category A Boom Cleaning/ Inspection)
- Engine Start/Stop
- Remote Secondary Stowage System
- Lanyard Interlock/Alarm Available on Select Platform Configurations

CONFIGURATIONS

CONFIGURATIONS		AA67-E100	AN67-E100	AA67E-E100	AN67E-E100
SPECIFICATIONS	Ground to Bottom of Platform*	100 ft (30.5 m)			
	Working Height*	105 ft (32 m)			
	Maximum Reach:				
	Side Reach	45.8 ft (14 m)		52.7 ft (16.1 m)	
	Front Reach (Elevator Extended)	60.8 ft (18.5 m)		67.7 ft (20.6 m)	
	Rear Reach (Elevator Extended)	62.8 ft (19.1 m)		69.7 ft (21.2 m)	
	Stowed Travel Height*	13' (4.0 m)			
	Platform Capacity	Up to 700 lbs (317.5 kg)			
	Maximum Jib Capacity	2000 lb (907.2 kg)		N/A	
	Lower Boom Articulation	0° to +105°		0° to +120°	
	Upper Boom Articulation	0° to +173°			
	Upper Boom Compensation	standard	N/A	standard	N/A
Minimum Platform to Ground Distance*	33 in (0.84 m) On ground with Platform to Ground Package		On ground		
Rotation	Continuous				
* Based on a 45 in (1143 mm) chassis frame height					

PLATFORM REACHES GROUND* FOR SAFER INGRESS/EGRESS



* Available on Extended Reach models and Non-Extended Reach models with the "Platform to Ground" package.

DEDICATED ELEVATOR CONTROLLER ALLOWS FAST, EFFICIENT OPERATION



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2019 Altec Inc. All Rights Reserved. AIOAAAN67E-100E-1219

