



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
ARTICULATING TELESCOPIC
AERIAL DEVICE

FEATURES

- Articulating and Telescoping Lower and Upper Booms
- 2100 lb (953 kg) Total Boom-tip Capacity in Any Boom Position
- Fiberglass Platform
 - » 1300 lb capacity 40 x 60 x 42 in
 - » End Mounted Rotating Platform
- Material Handling System
 - » Up to 1500 lb (680 kg) Capacity in Any Boom Position
 - » Hydraulically Extendible and Articulating Jib
 - » 180° Manually Rotating Jib/Winch Assembly
- Automatic Hydraulic Platform Leveling
- Category A Upgradeable - Standard Configuration Includes:
 - » Lower Test Electrode / Conductive Shield
 - » Pre-wired for Leakage Monitor
- Radial Outriggers
- Two Hydraulic Tool Circuits at Boom Tip
- Outrigger Boom Interlock System
- Secondary Stowage System
- Outrigger Motion Alarm
- Back Up Alarm

OPTIONS

- 765 kV AC / 500kV DC Category A rating
- Corona Ring
- Current Leakage Monitor
- Hydraulic Intensifier at Platform
- Platforms
 - » Aluminum 2100 lb capacity 35 x 96 x 42 in


SPECIFICATIONS	Ground to Bottom of Platform	118 ft (36.0 m)
	Working Height	123 ft (37.5 m)
	Maximum Reach From Centerline	50.4 ft (15.4 m)
	At Working Height	75.0 ft (22.9 m)
	Platform Capacity Fiberglass / Aluminum	1300 lb / 2100 lb (590 kg / 952 kg)
	Maximum Jib Capacity	1500 lb (680 kg)
	Maximum Combined Capacity, Platform & Jib	2100 lb (952 kg)
	Lower Boom Articulation	0 to 87°
	Lower Boom Telescopic Extension	40.0 ft (12.2 m)
	Upper Boom Articulation	0 to 160°
	Upper Boom Telescopic Extension	7.0 ft (2.1 m)
	Stowed Travel Height*	13.4 ft (4.1 m)
	Upper Boom Isolation (Minimum)	13.2 ft (4.0 m)
	Max. Boom Dielectric Rating**	500 kV
	Rotation	Continuous

Recommended safety features and additional accessories available through Altec Supply include a platform liner, fall protection system, wheel chocks and outrigger pads.

*Based on a chassis frame height of 40 inches (1016 mm) in compliance with ANSI A92.2-2015 Paragraph 6.2.2.3

**765 kV AC / 500 kV DC rating available with 17 feet (5.2 m) upper boom isolation gap; upper boom extension is reduced by 3 feet (0.9 m)

REACH DIAGRAM

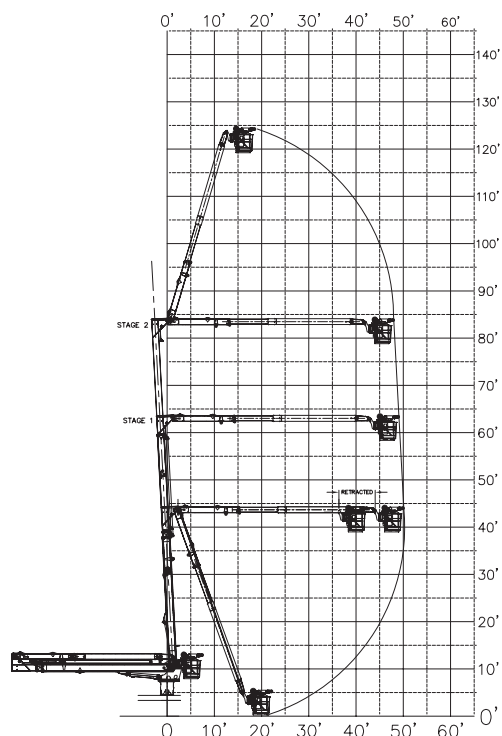

HIGH CAPACITY PLATFORM AND JIB MAXIMIZES PRODUCTIVITY



SINGLE HANDLE CONTROLLER FOR FAMILIAR, EFFICIENT OPERATION



LIGHTWEIGHT BOOM OPTIMIZES CHASSIS OPTIONS, INCLUDING 15 TONNE CLASS TRACK CARRIERS



CATEGORY A RATING UP TO 765KV AC /500KV DC AVAILABLE WITH CUSTOM BOOM OPTION



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2021 Altec Inc. All Rights Reserved. AIOAH125-0221