



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
OVERCENTER
AERIAL DEVICE

LR8 SERIES

FEATURES

- Altec ISO-Grip® Control System
- Mounts on Below FET Chassis
- Full Size Chip Box Provides Excellent Payload Capacity
- Insulating, ANSI Category C
- Insulating Lower Boom Insert
- Maintenance Free Elbow
- Round Upper Boom Reduces Potential Boom Damage
- Compact 10 ft (3 m) Compensated Vertical Elevator (LR860-E70)
- Outrigger Boom Interlock System
- Outrigger Motion Alarm
- Back Up Alarm
- No Required Major Scheduled Maintenance
- Lifetime Platform Leveling System
- Maintenance Free (Greaseless) Cylinders
- 400 lb Platform Capacity
- Lifetime Structural Warranty


OPTIONS

- LevelReady™ Setup Slope Interlock System: An operator aid that prevents boom movement until the unit is set up within its allowable slope limits
- Lanyard Interlock System
- Lanyard Alert System
- Dual Hydraulic Tool Circuits
- Insulating, ANSI Category B
- Under CDL RM Elevator Package
- Automatic Lower and Upper Boom Stow Systems
- Upper and Lower Boom Out of Stow Indicator Systems
- 90° Platform Rotator (Available with 24 x 24 or 24 x 30 Platform)
- 24 in x 30 in Platform Option
- 450 lb Platform Capacity Option on Non-Rotating Platforms
- Upper Boom Protective Sleeve
- Lower Boom Lifting Eye
- Turntable Handrail
- Arbuckle Lanyard Anchor System

Recommended safety equipment, available through Altec Supply, include a platform liner, fall protection system, wheel chocks and outrigger pads.

SPECIFICATIONS	CONFIGURATIONS		LR856 FM	LR856 RM	LR858 FM	LR858 RM	LR860 FM	LR860 RM	LR860-E70 (FM&RM)
	Ground to Bottom of Platform		56.3 ft (17.2 m)	55.6 ft (16.9 m)	58.3 ft (17.8 m)	57.6 ft (17.6 m)	60.3 ft (18.4 m)	59.6 ft (18.2 m)	70.3 ft (21.4 m)
	Working Height		61.3 ft (18.7 m)	60.6 ft (18.5 m)	63.3 ft (19.3 m)	62.6 ft (19.1 m)	65.3 ft (19.9 m)	64.6 ft (19.7 m)	75.3 ft (23 m)
	Maximum Reach from Centerline of Rotation		44.4 ft (13.5 m)		46.4 ft (14.2 m)		48.4 ft (14.8 m)		48.4 ft (14.8 m)
	Maximum Reach Upper Boom Non-Overcenter		41.6 ft (12.7 m)		43.6 ft (13.3 m)	42.8 ft (13.0 m)	44.8 ft (13.6 m)		44.8 ft (13.6 m)
	Stowed Travel Height		12.4 ft (3.8 m)	11.7 ft (3.6 m)	12.4 ft (3.8 m)	11.7 ft (3.6 m)	12.4 ft (3.8 m)	11.7 ft (3.6 m)	12.5 ft (3.8 m)
	Upper Boom Isolation Gap		17.0 ft (5.2 m)		19.0 ft (5.8 m)	17.0 ft (5.2 m)	19.0 ft (5.8 m)		19.0 ft (5.8 m)
	Platform Capacity		400 lb (181.4 kg)		400 lb (181.4 kg)		400 lb (181.4 kg)		400 lb (181.4 kg)
	Platform Dimensions		24 x 24 x 39 in (610 x 610 x 991 mm)		24 x 24 x 39 in (610 x 610 x 991 mm)		24 x 24 x 39 in (610 x 610 x 991 mm)		24 x 24 x 39 in (610 x 610 x 991 mm)
	Upper Boom Articulation		0 to 270°		0 to 270°		0 to 270°		0 to 270°
	Lower Boom Articulation		0 to 125°		0 to 125°		0 to 125°		0 to 125°
	Rotation		Continuous		Continuous		Continuous		Continuous


OPTIONAL LANYARD DETECTION SYSTEM

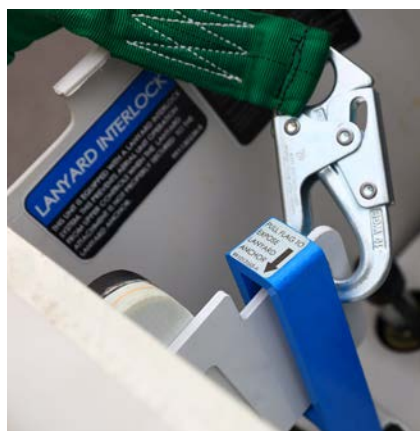

LEVELREADY™ SETUP SLOPE INTERLOCK SYSTEM



REACH DIAGRAM

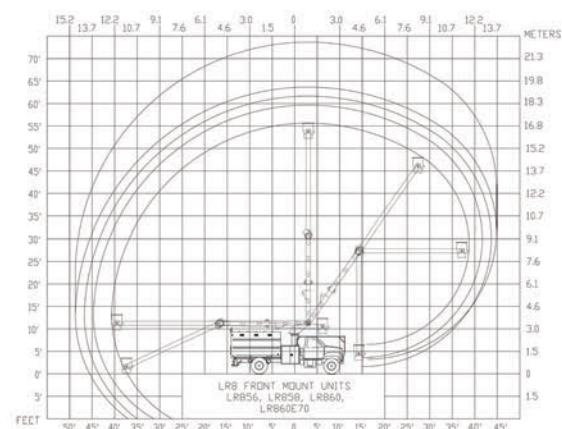

For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2026 Altec Inc. All Rights Reserved. AIOS_LR8Series_082826



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM