



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
NON-OVERCENTER
AERIAL DEVICE

AN SERIES

FEATURES



- Platform Leveling System - Chain and Rod in Lower and Upper Booms
- Lower Boom Non-Overstow Protection System
- Hydraulic Platform Tilt
- Material Handling System with Hydraulic Extend Jib
- Altec ISO-Grip® Control System
- Outrigger Motion Alarm
- Outrigger Boom Interlock System
- Electric/Hydraulic Outrigger Controls
- Back-Up Alarm
- Powder Coat Painted Prior to Assembly
- Two Sets of Hydraulic Tool Circuits at Each Platform
- Diagnostic Pressure Test Quick Disconnect Couplings
- Continuous Rotation
- Hydraulic Platform Rotators (if so equipped)
- Emergency Stop Valves at all Upper and Lower Control Stations
- Pilot Pressure System

OPTIONS

- Automatic Upper Boom Stow System
- Engine Start/Stop
- Remote Secondary Stowage System
- Jib Adapter
- Phase Lifting Jib Attachment
- One 2-Man Platform
- 180° Rotator, End Hung, Personnel Only Platform
- Lanyard Detection System Available on Select Platform Configurations
- Altec Load Monitoring System (Available on Select Models)

Recommended safety features and additional accessories available through Altec Supply include a platform liner, fall protection system, wheel chocks and outrigger pads.

REACH DIAGRAM

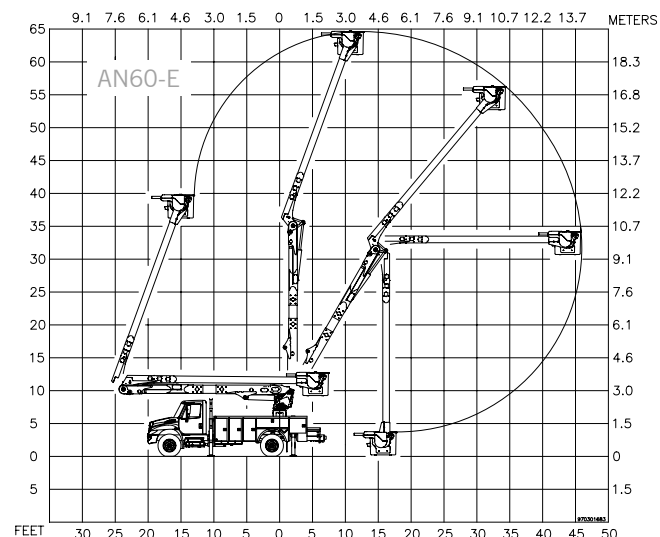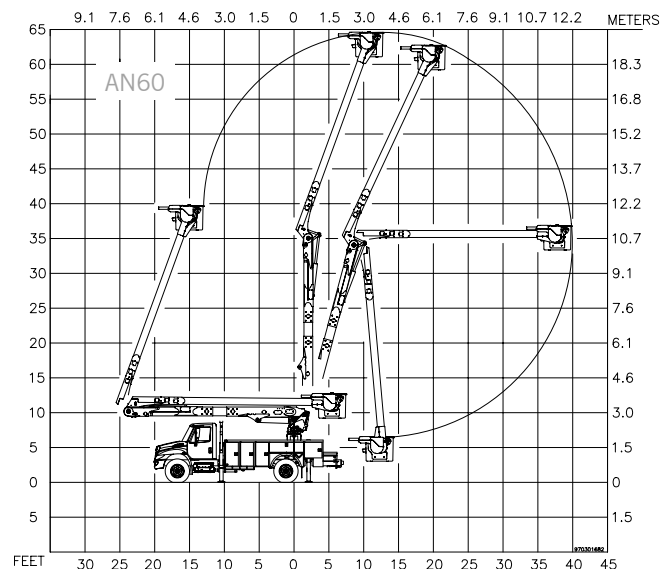

CONFIGURATIONS		AN50	AN55	AN60	AN50E	AN55E	AN60E
SPECIFICATIONS	Ground to Bottom of Platform	50.1 ft (15.3 m)	55.1 ft (16.8 m)	60.1 ft (18.3 m)	50.1 ft (15.3 m)	55.1 ft (16.8 m)	60.1 ft (18.3 m)
	Working Height*	55.1 ft (16.8 m)	60.1 ft (18.3 m)	65.1 ft (19.8 m)	55.1 ft (16.8 m)	60.1 ft (18.3 m)	65.1 ft (19.8 m)
	Maximum Side Reach from Centerline of Rotation to Lip of Platform	34.6 ft (10.5 m)	37.7 ft (11.5 m)	40.8 ft (12.4 m)	39.1 ft (11.9 m)	43.1 ft (13.1 m)	46.8 ft (14.3 m)
	Height at Bottom of Platform at Maximum Reach	27.5 ft (8.4 m)	29.2 ft (8.9 m)	31.2 ft (9.5 m)	24.7 ft (7.5 m)	26.6 ft (8.1 m)	28.1 ft (8.6 m)
	Platform Capacity	Up to 700 lb (318 kg)	Up to 700 lb (318 kg)	Up to 700 lb (318 kg)	Up to 700 lb (318 kg)	Up to 700 lb (318 kg)	Up to 700 lb (318 kg)
	Stowed Travel Height*	11.5 ft (3.5 m)	11.5 ft (3.5 m)	11.5 ft (3.5 m)	11.5 ft (3.5 m)	11.5 ft (3.5 m)	11.5 ft (3.5 m)
	Maximum Jib Capacity	2,000 lb (907 kg)	2,000 lb (907 kg)	2,000 lb (907 kg)	2,000 lb (907 kg)	2,000 lb (907 kg)	2,000 lb (907 kg)
	Lower Boom Articulation	0 to 105°	0 to 105°	0 to 105°	0 to 120°	0 to 120°	0 to 120°
	Upper Boom Articulation	0 to 173°	0 to 173°	0 to 173°	0 to 173°	0 to 173°	0 to 173°
	Rotation	Continuous	Continuous	Continuous	Continuous	Continuous	Continuous

*Based on a 40 in (1016 mm) chassis frame height.

For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission. © 2020 Altec Inc. All Rights Reserved. AIOSAN-NOC-SERIES-120