



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
 TO SPEAK WITH AN ALTEC REPRESENTATIVE
 or visit us online at altec.com

 **Altec**
 NON-INSULATING ARTICULATING
 TELESCOPIC AERIAL CABLE PLACER

AT238P

FEATURES

- Telescopic Articulating Non-Insulated Aerial Device
- Dual Boom Tip Receiver and Pulling Eye Assembly
- Enhanced Two-Way Voice Communication System from Platform to Cab
- Hydraulically Extended Boom
- Push-Button Pendant Lower Controls
- Turntable Mounted Boom Rest
- End-mounted Steel Placer Platform 29 x 30 x 42 in (736.6 x 762 x 1066.8 mm) Nominal
- Hydraulic Platform Leveling
- Platform Capacity to 400 lb (181 kg)
- Engine Start/Stop at Upper and Lower Controls
- Manual Lowering Valve
- Protected Hydraulic Tank Internally Mounted to Formed Pedestal
- 120 VAC Circuit in Boom with GFI Outlet at the Platform
- Single Handle Proportional Controls


OPTIONS

- Lanyard Detection System configurable as alert-only, or interlocking to prevent boom movement
- Secondary Stowage System
- Fork Arms Equipped with Adjustable Pinning Positions for Pulling Eye/Fairlead
- Platform Tool Trays
- Camera System on Boom for Wide-Angle Operator and Work Zone Monitoring and at Rear for Back-Up and Parking Assistance

Recommended safety equipment, available through Altec Supply, include a fall protection system and wheel chocks for stationary set-ups.

SPECIFICATIONS	Ground to Bottom of Platform*	38.0 ft (11.58 m)
	Working Height*	43.0 ft (13.11 m)
	Maximum Side Reach at Platform Height	26.5 ft (8.08 m)
	Stowed Travel Height*	10.3 ft (3.14 m)
	Platform Capacity, Maximum with Cable Placing Equipment	400 lb (181 kg) 300 lb (136 kg)
	Lower Boom Articulation	- 27° to 74°
	Articulating Arm Articulation	-6° to 74°
	Rotation	Non-Continuous, 370°
* Based on a 40 in (1016 mm) chassis frame height		

REACH DIAGRAM

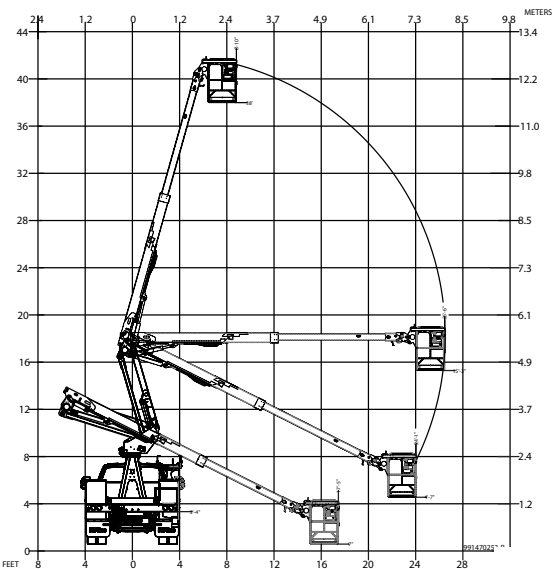

ADDITIONAL PLATFORM CAPACITY UP TO 400 LBS FOR PERSONNEL USE



CLEAR STORAGE SPACE WITH NO BED MOUNTED BOOM REST OR EXPOSED HYDRAULIC TANK



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2026 Altec Inc. All Rights Reserved. AIOSAT238P-081226