



Altec AT30-GV Telescopic Insulated Aerial Device



- Altec ISO-Grip® System
- Boom Tip Covers for Added Safety
- 36.9 ft (11.2 m) Working Height
- 21.3 ft (6.4 m) Side Reach
- Continuous Rotation
- Hydraulic Tool Circuit at the Platform
- No Outriggers Required
- Low Life-Cycle Cost

STANDARD FEATURES

- Telescopic Aerial Device
- Altec ISO-Grip® System
- Hydraulic Boom Extension
- Hydraulic Platform Leveling
- Insulated, ANSI Category C, 46 kV and Below
- Continuous Rotation
- Platform, 24 x 24 x 42 in (610 x 610 x 1067 mm)
- Platform Capacity — 300 lb (136 kg) Side-Mounted
- Full Pressure, Open Center Hydraulic System
- Emergency Lowering Valve
- Tool Circuit at Platform
- Back-Up Alarm

OPTIONS

- Secondary Stowage System
- Platform Cover
- Engine Start/Stop
- Tool Trays and Pouches
- Tailshelf Boomrest

RECOMMENDED FEATURES

- Fall Protection System
- Wheel Chocks
- Platform Liner

GENERAL SPECIFICATIONS

Ground to Bottom of Platform*	31.9 ft	9.7 m
Maximum Reach (Side-Mount)	21.3 ft	6.4 m
Stowed Travel Height	10.2 ft	3.1 m
Boom Articulation	-13.5° to +80°	
Rotation	Continuous 360°	

*Based on 40 in (1016 mm) Chassis Frame Height




ISO-Grip® System



Boom Tip Covers

REACH DIAGRAM

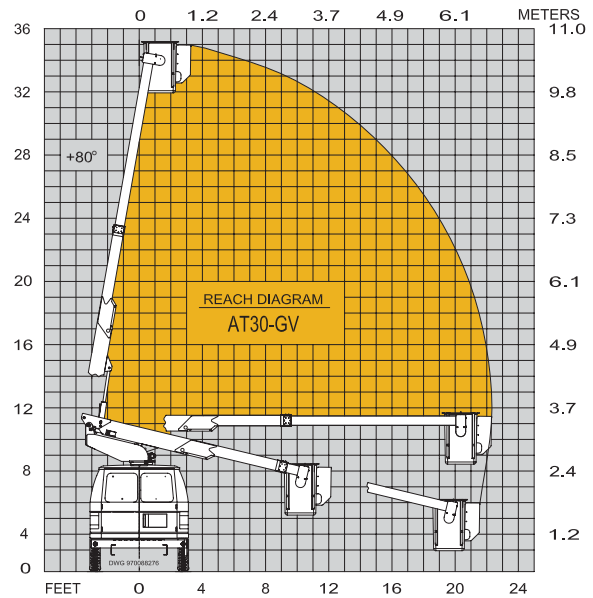

Altec Aerial Devices meet or exceed all applicable ANSI standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.