



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
TELESCOPIC ARTICULATING
AERIAL DEVICE

AT335

FEATURES

- Telescopic Articulating Non-Insulating Aerial Device
- Hydraulically Extended Boom
- Single Handed Variable Speed Ergonomic Upper Controls
- Push-Button Pendant Lower Controls
- Non-Continuous 370° Rotation
- End-Mounted Platform 26 x 26 x 42 in (660.4 x 660.4 x 1066.8 mm)
- Hydraulic Platform Leveling
- Platform Capacity up to 400 lb
- Engine Start/Stop at Upper and Lower Controls
- Manual Lowering Valve
- 120 VAC Circuit in Boom (GFCI Protected) with Outlet at Platform
- Storage Area at Platform with 12V AC Power Outlet


OPTIONS

- Lanyard Detection System configurable as alert-only, or interlocking to prevent boom movement
- Platform Rotator Offering 180° of Rotation
- Platform with Additional Toe Space
- Secondary Stowage System
- Post Pedestal or Bridge Mount Pedestal
- Heater for Platform
- Tool Pouches and Trays
- Dual USB Power Outlet at Platform

Recommended safety features and additional accessories available through Altec Supply include a fall protection system, platform liner and wheel chocks.

SPECIFICATIONS	Ground to Bottom of Platform	35.7 ft (10.9 m)
	Working Height	40.7 ft (12.4 m)
	Platform Capacity	400 lb (181 kg)
	Maximum Side Reach	27.2 ft (8.3 m)
	Maximum Side Reach (Rotator)	28.1 ft (8.6 m)
	Stowed Travel Height*	11.3 ft (3.4 m)
	Lower Boom Articulation	-22 to 74°
	Articulating Arm Articulation	0 to 101°
	Rotation	Non-Continuous, 370°
*Based on a 40 in (1016 mm) chassis frame height.		

REACH DIAGRAM

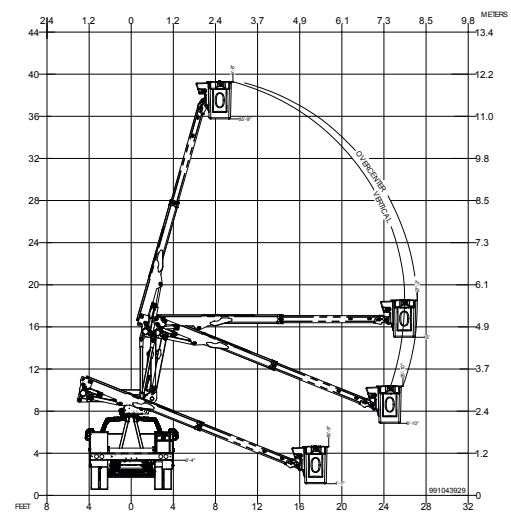

INTEGRATED TURNABLE BOOM REST FREES UP CARGO BED FOR MORE STORAGE



EASY-TO-USE CONTROLS WITH LANYARD DETECTION MOMENTARY OVERRIDE SWITCH



UPDATED LAYOUT WITH LANYARD DETECTION WARNING LIGHT



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission. © 2025 Altec Inc. All Rights Reserved. AIOSAT335-022425



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM