



FOR NEW EQUIPMENT SALES, CALL  
**800.958.2555**  
TO SPEAK WITH AN ALTEC REPRESENTATIVE  
or visit us online at [altec.com](http://altec.com)

 **Altec**  
TELESCOPIC ARTICULATING  
AERIAL DEVICE

## FEATURES

- Altec ISO-Grip® Control System
- 4-Function, Single Handle Upper Control
- Insulating, ANSI Category C
- Compensated Articulating Arm
- Fiberglass Upper Boom and Lower Boom Insulator
- Hydraulic Boom Extension
- Platform Access from Ground
- Hydraulic 180° Platform Rotation with Platform Tilt
- Full-Pressure, Open-Center Hydraulic System
- Outrigger Motion Alarm and Outrigger Interlocks
- Emergency Stop Valves at all Upper and Lower Control Stations
- Easily Mounted on 19,500 lb (8,845 kg) GVWR Chassis
- Tool Circuit at Platform

## OPTIONS


- Altec ARM Jib Offering Jib Capacities up to 800 lb (362.9 kg)
- 2-Man Platform with 180° Platform Rotation and 600 lb (272.2 kg) Platform Capacity
- Secondary Stowage System
- Engine Start/Stop
- Second Tool Circuit at Platform
- Tool Circuit Below Rotation
- Manual Throttle
- Jib Adapter
- Phase Lifting Jib Attachment
- Platform Cover

Recommended safety equipment, available through Altec Supply, include a platform liner, fall protection system, wheel chocks and outrigger pads.

## CONFIGURATIONS

|                                            | AT36M                                       | AT36P                                       |
|--------------------------------------------|---------------------------------------------|---------------------------------------------|
| Ground to Bottom of Platform*              | 35.7 ft (10.9 m)                            | 35.7 ft (10.9 m)                            |
| Working Height*                            | 40.7 ft (12.4 m)                            | 40.7 ft (12.4 m)                            |
| Maximum Side Reach<br>(at Platform Height) | 25.8 ft (7.9 m)<br>16.3 ft (5.0 m)          | 25.8 ft (7.9 m)<br>16.3 ft (5.0 m)          |
| Stowed Travel Height*                      | 11.1 ft (3.4 m)                             | 11.1 ft (3.4 m)                             |
| Upper Boom Isolation Gap                   | 38.5 in (977.9 mm)                          | 38.5 in (977.9 mm)                          |
| Articulating Arm Isolation Gap             | 9.5 in (241 mm)                             | 9.5 in (241 mm)                             |
| Platform Capacity                          | 400 lb (181.4 kg)                           | 400 lb (181.4 kg)                           |
| Platform Dimensions                        | 24 x 30 x 42 in<br>(610 x 762 x 1,066.8 mm) | 24 x 30 x 42 in<br>(610 x 762 x 1,066.8 mm) |
| Lower Boom Articulation                    | -25 to 75°                                  | -25 to 75°                                  |
| Articulating Arm Articulation              | -3 to 74°                                   | -3 to 74°                                   |
| Rotation                                   | Continuous                                  | Continuous                                  |

\*Based on a 40 in (1016 mm) chassis frame height.

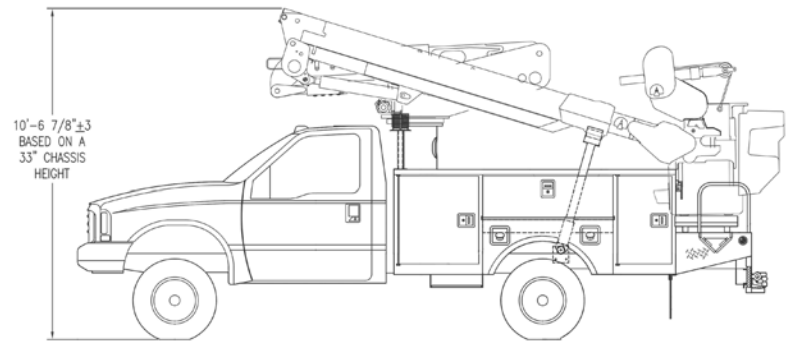


### General Specifications Key:

The Letter 'M' in the Model Name Indicates the Material Handling Configuration.

The Letter 'P' in the Model Name Indicates the Personnel Configuration.

## REACH DIAGRAM

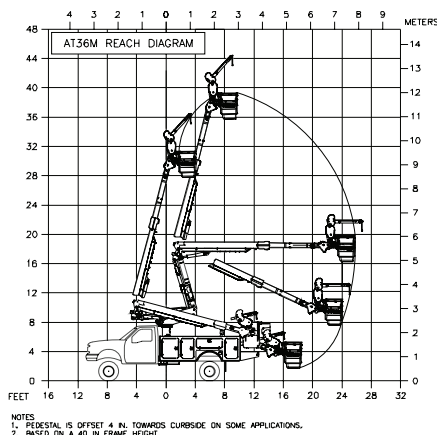

## DESIGNED FOR CONFINED WORKING AREAS USING 60 IN CA



## LOWER ARM TO RISE ABOVE AND TELESCOPE OVER OBSTACLES



For more complete information on Altec products and services, visit us on the web at [www.altec.com](http://www.altec.com). Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.  
© 2015 Altec Inc. All Rights Reserved. AIOSAT36MP-0315-v1-r1