



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
TELESCOPIC ARTICULATING
AERIAL DEVICE

AT40GW

FEATURES

- Telescopic Articulating Aerial Device
- Altec ISO-Grip® Control System
- Low Power Fiber Optic Control System
- Track-Driven Carrier with Retractable Tracks to 34 in
- Handheld Pendant Ground Drive Controls
- Insulating, ANSI Category C
- Platform Leveling Control at Lower Controls
- 180° Platform Rotator
- 1000 lb (453.6 kg) Cargo Deck Capacity
- Drive/Outrigger and Aerial Device Selector Switch
- Outrigger Boom Interlock System
- Outrigger Controls with Motion Alarms
- Back Up Alarm

OPTIONS

- ISO-Boom Offering ANSI Category C Isolation with Boom Retracted
- Trailer




Recommended safety equipment, available through Altec Supply, include a platform liner, fall protection system, wheel chocks and outrigger pads.

SPECIFICATIONS

Ground to Bottom of Platform	38.1 ft (11.6 m)
Working Height	43.1 ft (13.1 m)
Maximum Reach from Centerline of Rotation	29.9 ft (9.1 m)
Platform Capacity	400 lb (181.4 kg)
Articulating Arm Articulation	-5 to 79°
Upper Boom Articulation	-25 to 75°
Upper Boom Telescopic Extension	128 in (3,251 mm)
Stowed Travel Height*	7.6 ft (2.3 m)
Boom Isolation Gap	
Minimum (When Fully Retracted)	36.9 in (937 mm)
Maximum (When Fully Extended)	41.7 in (1,059 mm)
Articulating Arm Isolation Gap	12 in (305 mm)
TRAILER SPECIFICATIONS	
Minimum GVWR	14,000 lb (6,350.3 kg)
Weight of Trailer	4,500 lb (2,041.1 kg)
Maximum Track Extension Width	46.8 in (1,188.7 mm)
Minimum Track Retraction Width	34 in (863.6 mm)
Track Length	78 in (1,981.2 mm)
Maximum Drive Slope	15° Front to Back 10° Side to Side
Weight of Machine (Including Aerial Device and Tracked Carrier)	7,600 lb (3,447.3 kg)
*Based on a Track Trailer in Compliance with ANSI A92.2-2001 Paragraph 6.2.2.3	

REACH DIAGRAM

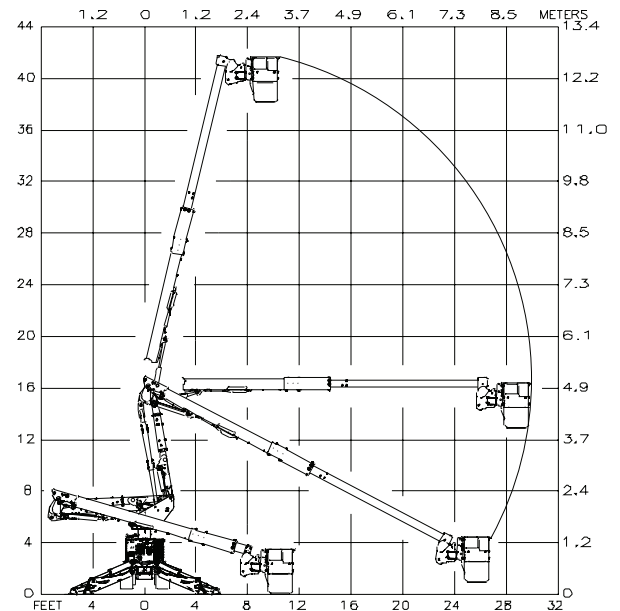

AT40-CW REACH
DIAGRAM

RADIAL OUTRIGGERS



RETRACTS TO 34 INCHES



WALK-BEHIND REMOTE CONTROL



EASILY ACCESSED FROM GROUND



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2015 Altec Inc. All Rights Reserved. AIOSAT40GW-1114-v1-r2



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM