



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
 TO SPEAK WITH AN ALTEC REPRESENTATIVE
 or visit us online at altec.com

 **Altec**
 TELESCOPIC ARTICULATING
 AERIAL DEVICE

FEATURES

- Compensated Articulating Arm
- Hydraulic Boom Extension
- 180° Hydraulic Platform Rotation and Tilt
- Full Pressure, Open Center Hydraulic System
- Outrigger Motion Alarm and Outrigger Interlocks
- Four-Function Proportional Single Handle Upper Control
- Platform Access from Ground
- Emergency Stop Valves at all Upper and Lower Control Stations
- Hydraulic Tool Circuit at the Platform
- Easily Mounted on 19,500 lb (8,845 kg) GVWR Chassis

OPTIONS



- Material Handling System up to 600 lb (272 kg) Capacity
- Secondary Stowage System
- 110V Outlet at the Boom Tip
- Engine Start/Stop
- Tool Circuit Below Rotation
- Manual Throttle

Recommended safety features include a fall protection system, wheel chocks and outrigger pads.

SPECIFICATIONS	Ground to Bottom of Platform	40 ft (12.2 m)
	Working Height	45 ft (13.7 m)
	Maximum Reach from Centerline of Rotation (at Platform Height)	30.3 ft (9.2 m) 16.5 ft (5 m)
	Platform Dimensions	60 x 36 x 45 in (1,524.0 x 914.0 x 1,143.0 mm)
	Platform Capacity	
	without Material Handling	500 lb (227 kg)
	with Material Handling	440 lb (200 kg)
	Articulating Arm Articulation	-25 to 75°
	Lower Boom Articulation	-3 to 74°
	Rotation	Continuous



REACH DIAGRAMS

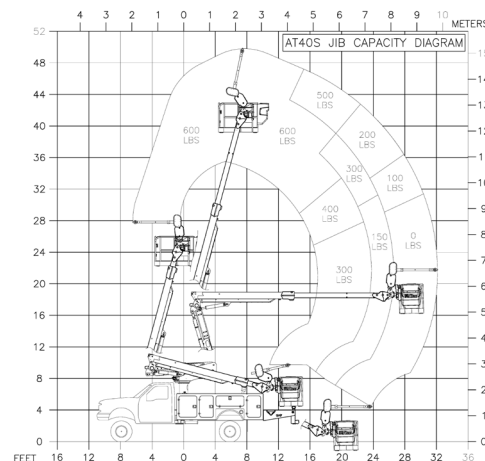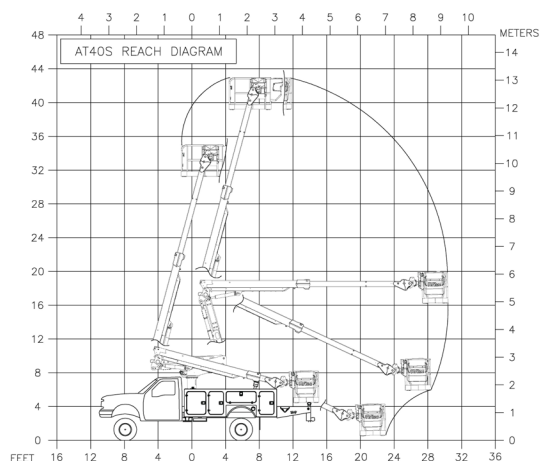

EASY ACCESS FROM THE GROUND



180 DEGREE PLATFORM ROTATION



MATERIAL HANDLING SYSTEM UP TO 600 LB (272 KG) CAPACITY



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2015 Altec Inc. All Rights Reserved. AIOSAT40S-0215-v1

