



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
TRACKED AERIALS

TEUPEN TC/TL115SJ^{plus}

SPECIFICATIONS

PERFORMANCE

Max Working Height 661.3 lbs / 881.8 lbs (300 kg / 400 kg)	114.8 ft / 104.9 ft (35 m / 32 m)
Max Working Height (both sides narrow)	98.4 ft (30 m)
Max Working Height (one side narrow)	104.9 ft (32 m)
Max Platform Height 661.3 lbs / 881.8 lbs (300 kg / 400 kg)	108.2 ft / 98.4 ft (33 m / 30 m)
Max Platform Height (both sides narrow)	91.8 ft (28 m)
Max Platform Height (one side narrow)	98.4 ft (30 m)
Max Horizontal Outreach (881.8 lbs/400 kg)	42.6 ft (13 m)
Max Horizontal Outreach (661.3 lbs/300 kg)	45.9 ft (14 m)
Max Horizontal Outreach (308.6 lbs/140 kg)	52.5 ft (16 m)
Max Platform Capacity	881.8 lbs (400 kg)
Max Platform Capacity (both sides narrow)	551.1 lbs (250 kg)
Jib, Movable	180°
Platform Rotation	180°
Max Turntable Rotation	450°
To be Jacked up on Ground Slope of	16.7° / 30 %
Track drive, height and width adjustable	9.4 in / 8.6 in (24 cm / 22 cm)
Gradeability, Max	16.7° / 30 %
Slope Angle, Max	21° / 38 %
Travel Speed, Max	1.8 mph (3 kph)

WEIGHT

Total Weight	12,125.4 lbs (5,500 kg)
Live Load in Traveling Position	87 psf (4.1 kN/m²)
Live Load in Working Position	45.1 psf (2.1 kN/m²)
Point Load per Outrigger Plate, Max	8,093.1 lbf (36 kN)

POWER SOURCES

Standard Power Sources	
Electric	115 V, 20 A, 1.6 kW
Diesel	Kubota D902 (16.1 kW / 21.9 hp)
Optional Power Source (Battery Drive: AGM)	80 V
Fuel Tank Capacity (Diesel Engine)	10.3 gal (39 L)

POWER SUPPLY


Electric Current, Max	115 V / 20 A
-----------------------	--------------

The technical data may deviate +/- 3% from the specified values.


* Weight and dimensions may vary depending on options and accessories.

MEASUREMENTS*

Platform Height (A)	3.6 ft (1.1 m)
Platform Length (B)	3.9 ft (1.2 m)
Platform Width (C)	2.6 ft (0.8 m)
Length (D)	26.2 ft (8 m)
Length without platform (E)	25.5 ft (7.8 m)
Height (F)	6.5 ft (1.9 m)
Width, min. (G)	5.1 ft (1.5 m)
Max Ground Clearance (H)	1.4 ft (0.4 m)
Track (length x width) (I)	6.2 ft x 0.8 ft (1.9 m x 0.2 m)
Stabilizer footprint both sides wide (length) (J)	18 ft (5.5 m)
Stabilizer footprint both sides wide (width) (K)	18.3 ft (5.6 m)
Stabilizer footprint one side narrow (length) (L)	24.7 ft (7.5 m)
Stabilizer footprint one side narrow (width) (M)	9.8 ft (2.9 m)
Stabilizer footprint both sides narrow (width) (N)	14.1 ft (4.3 m)
Stabilizer footprint both front or back narrow (length) (O)	21.4 ft (6.5 m)
Stabilizer plate (length x width)	1 ft x 0.7 ft (0.3 m x 0.2 m)

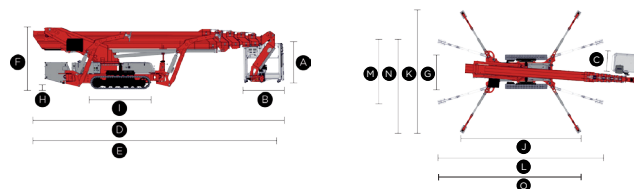

WORKING ENVELOPE

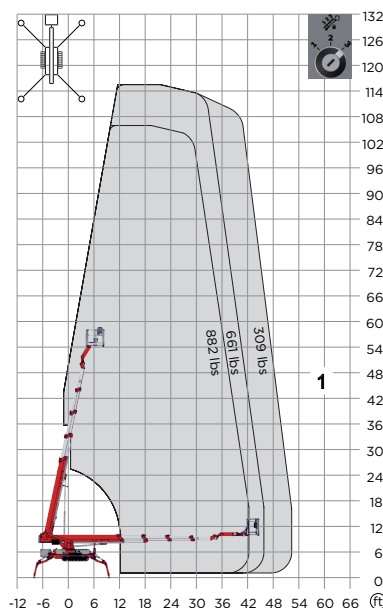

EN ISO 9001



ANSI/SIA A92.20

For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission. © 2026 Altec Inc. All Rights Reserved. Altec_TCTL115SJplus_SBM_031626



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM