





205


3S

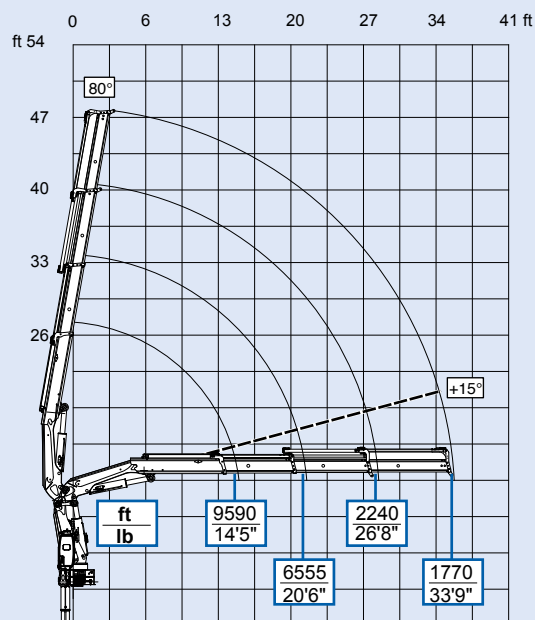


4S

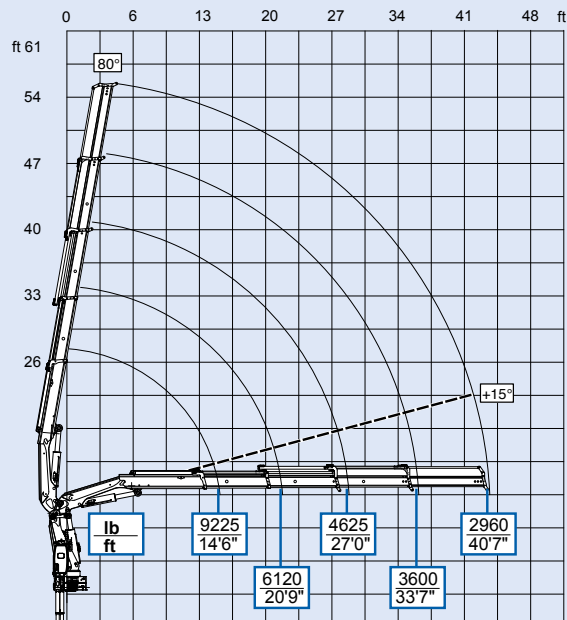


5S

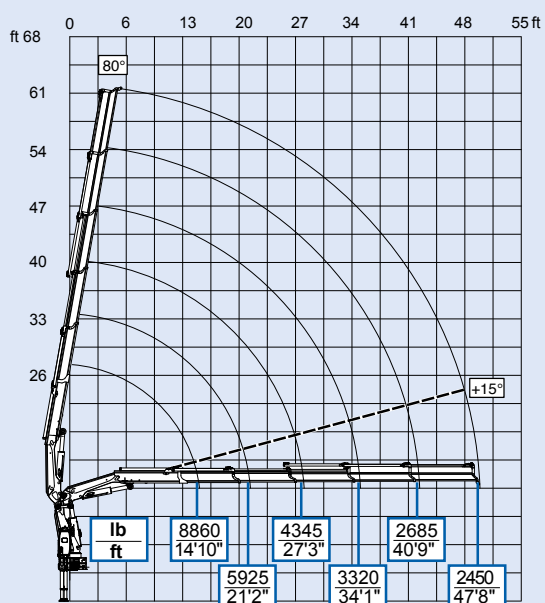


6S

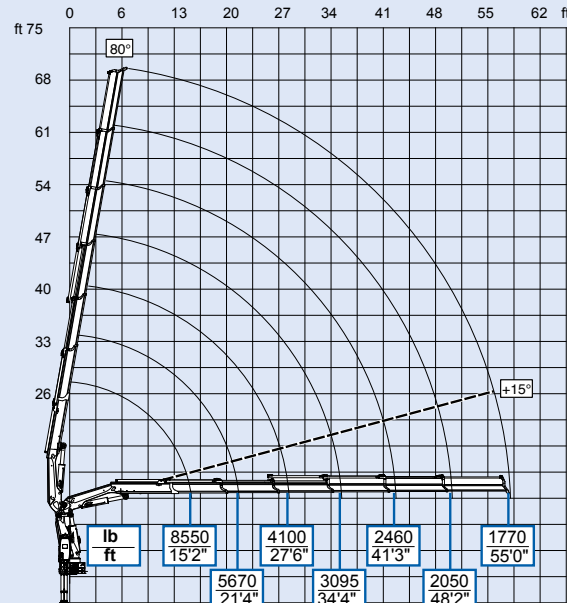



4S + JIB 3S

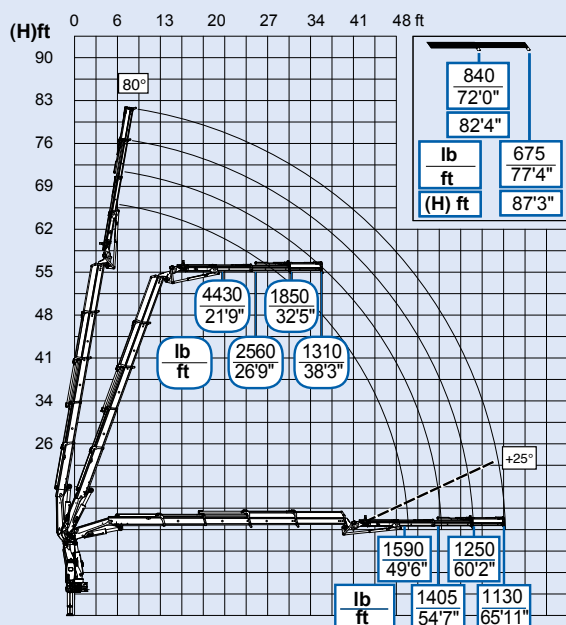

4S + JIB 4S

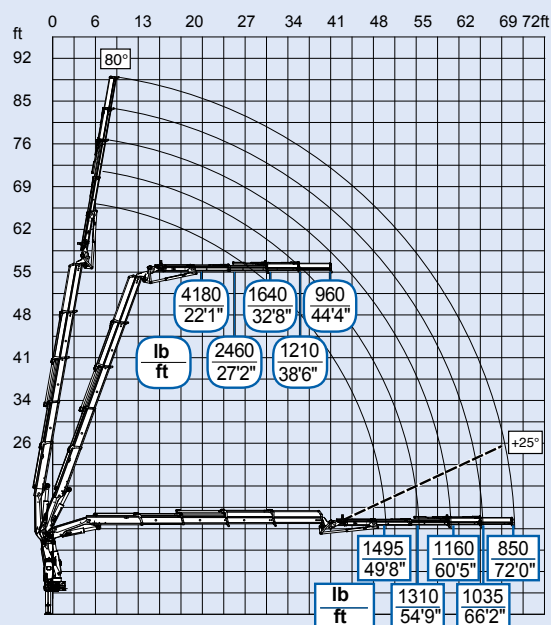

5S + JIB 2S

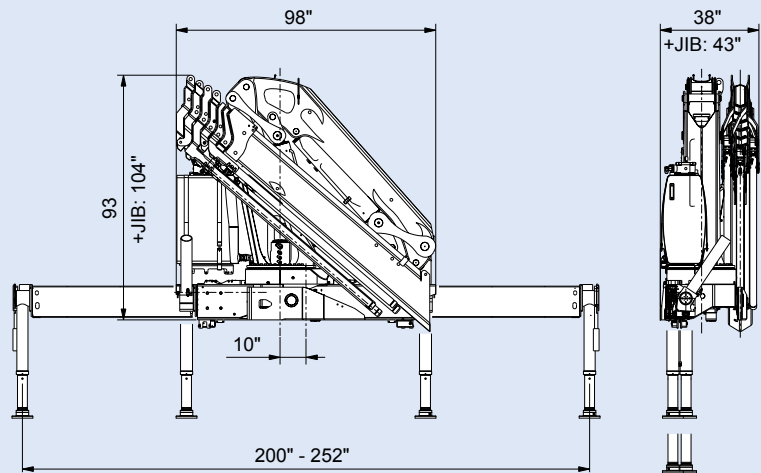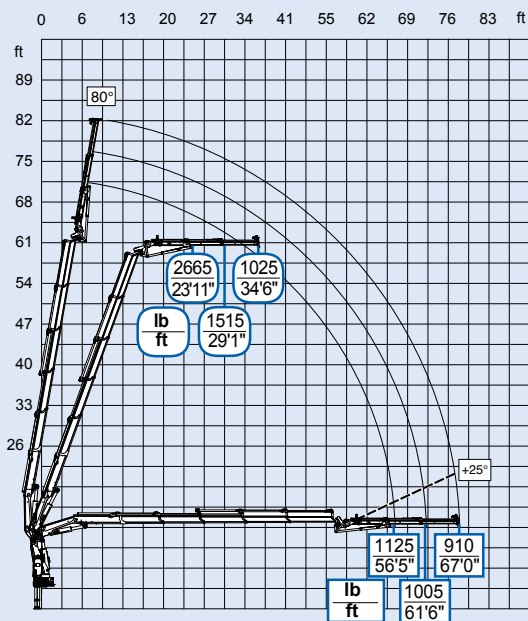

[inches]

STANDARD



OPTIONAL



FOR MORE INFO AND TECHNICAL DETAILS GO TO [EFFER PRODUCT GUIDE](#)

DESCRIPTION	UNIT OF MEASURE	2S	3S	4S	5S	6S
Max. hydraulic outreach	ft	26'8"	33'11"	41'1"	48'3"	55'6"
Max. lifting moment (+20°)	ft/lbs	151315	147960	145020	141840	139670
Slewing arc	[°]	endless				
Slewing Capacity - Max slope	%	8.7				
Working pressure	psi	5075				
Recommended oil delivery	gal/min	15.8				
Oil tank capacity	gal	21				
Weight of the standard crane with stabilizers and oil (± 2%)	lb	5480	5715	6015	6300	6545



ALTEC, INC.

210 Inverness Center Drive
Birmingham, Alabama 35242
800.958.2555
sales@altec.com | altec.com/effer

