



395



ENGLISH




395

The 395 crane has the perfect balance between lifting capacity and dimensions, since it has been designed to have an extremely reduced space behind the cab and a very low weight. These results have been obtained thanks to an innovative design and the careful selection of components. The reliable PROGRESS electronics has also made it possible to reach a remarkable manoeuvrability, granting all the highest safety standards.




RECOMMENDED LOAD DIAGRAMS


4S JIB 3S

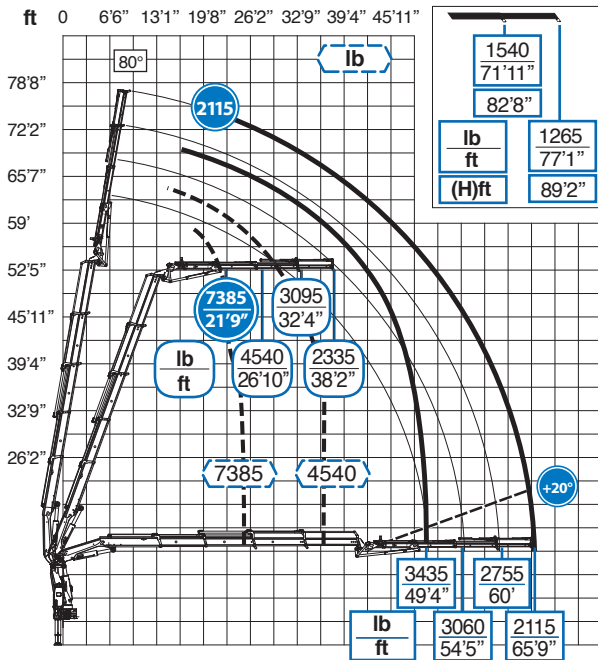


4S

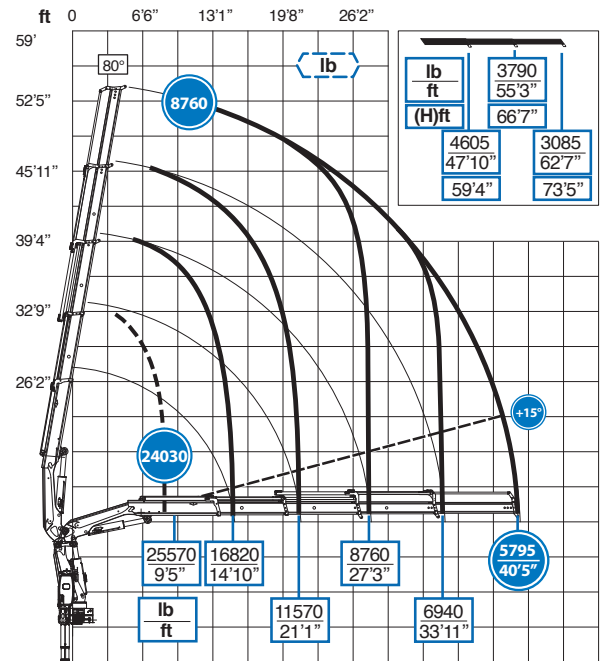


4S JIB 4S

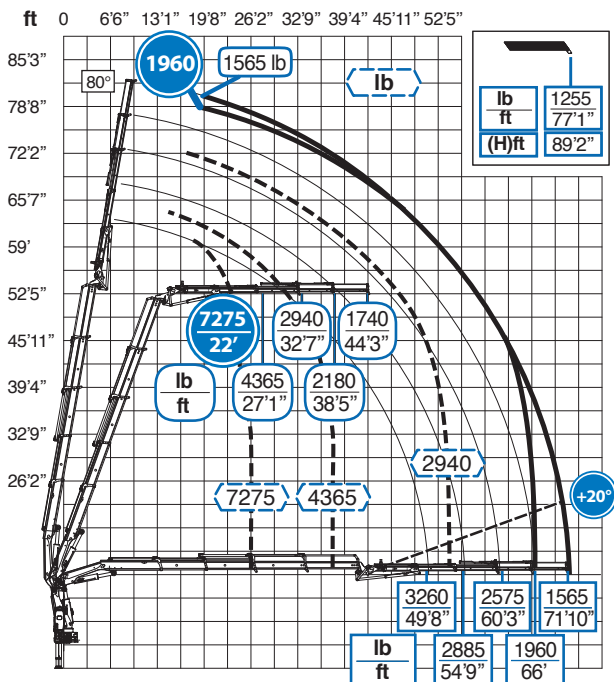


5S

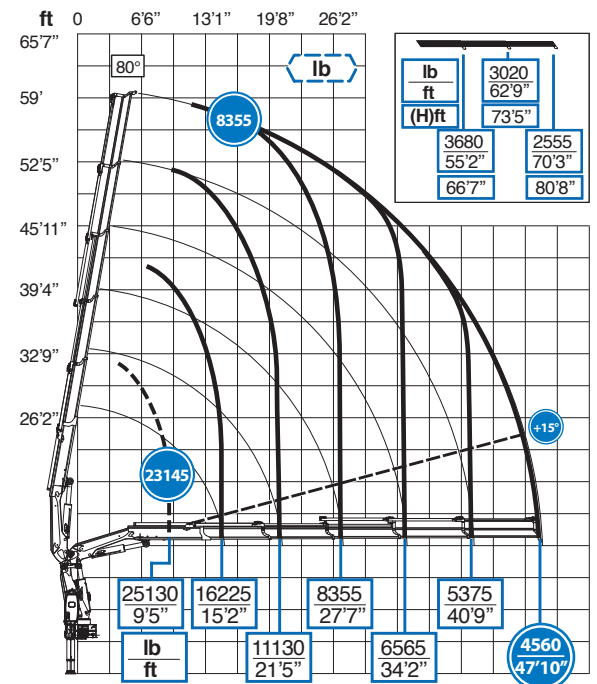


5S JIB 4S

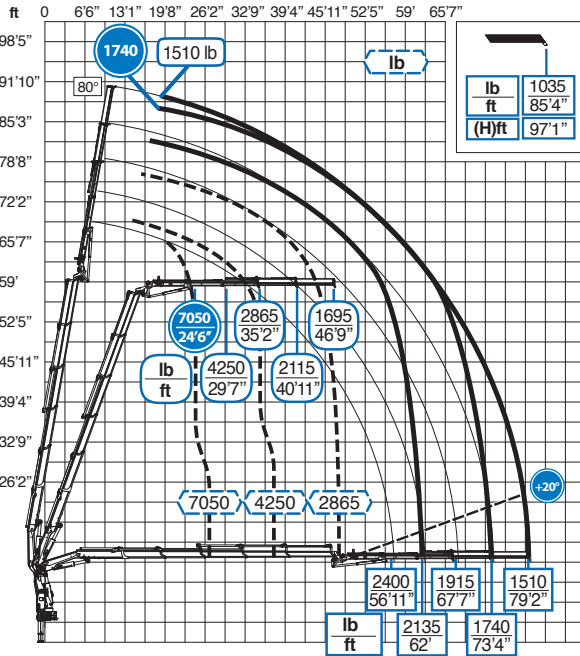


5S JIB 3S

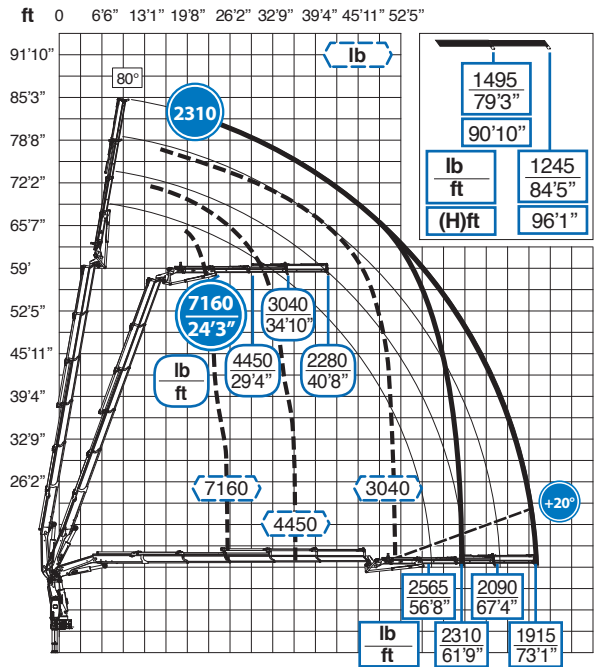



6S

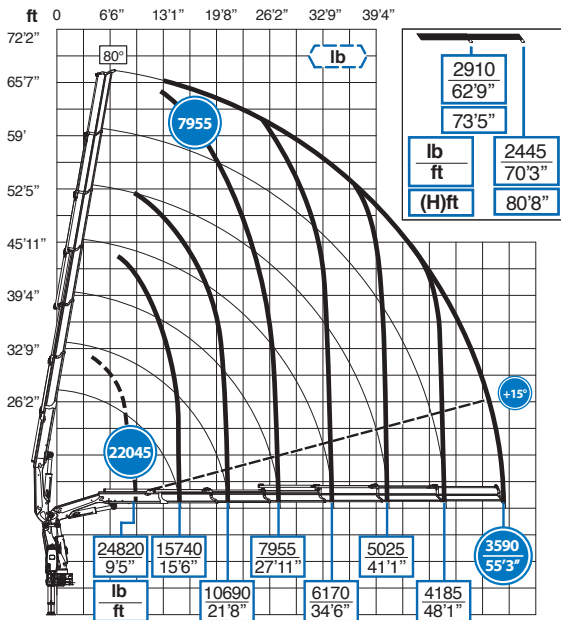

6S JIB 3S

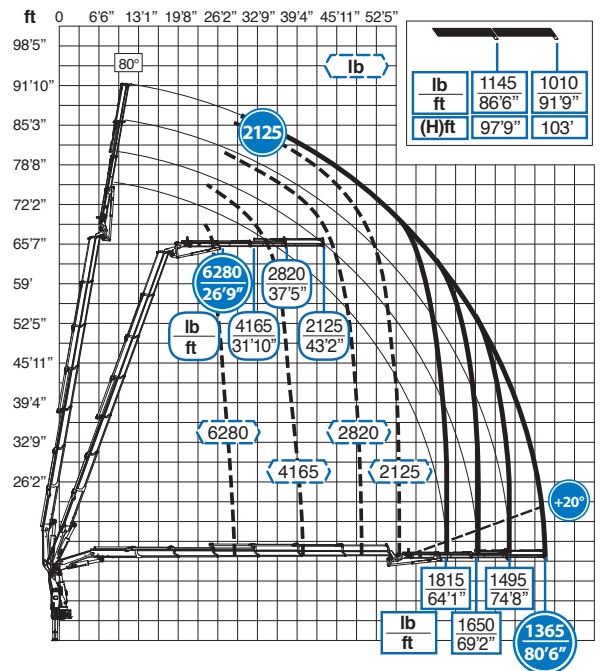


6S JIB 4S

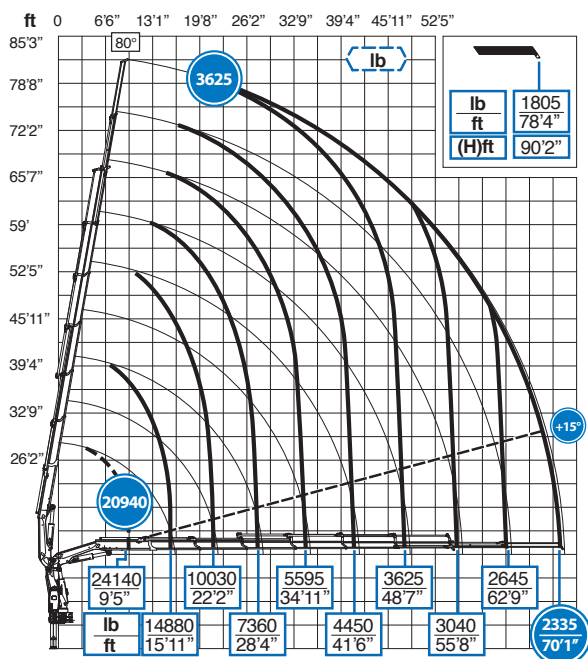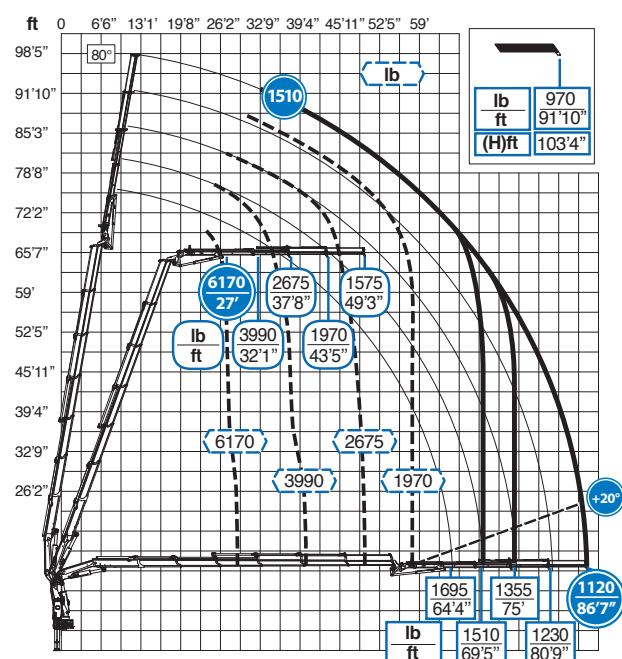

PERFORMANCE

DESCRIPTION	UNIT OF MEASURE	3S	4S	5S	6S	7S	8S
Max. hydraulic outreach	ft	34'4"	40'11"	48'3"	55'8"	63'1"	70'6"
Max. lifting moment (+20°)	lb*ft	254580	250709	246947	244269	240435	237975
Slewing arc	(°)	endless / continua / endlos / sans fin / sin fin					
Slewing Capacity - Max slope	%	8,7					
Working pressure	p.s.i.	5148					
Recommended oil delivery	gpm	26,41					
Oil tank capacity	gal.	42,26					
Weight of the standard crane (± 2%)	lb	8320	8730	9080	9410	9710	9975

DIMENSIONS

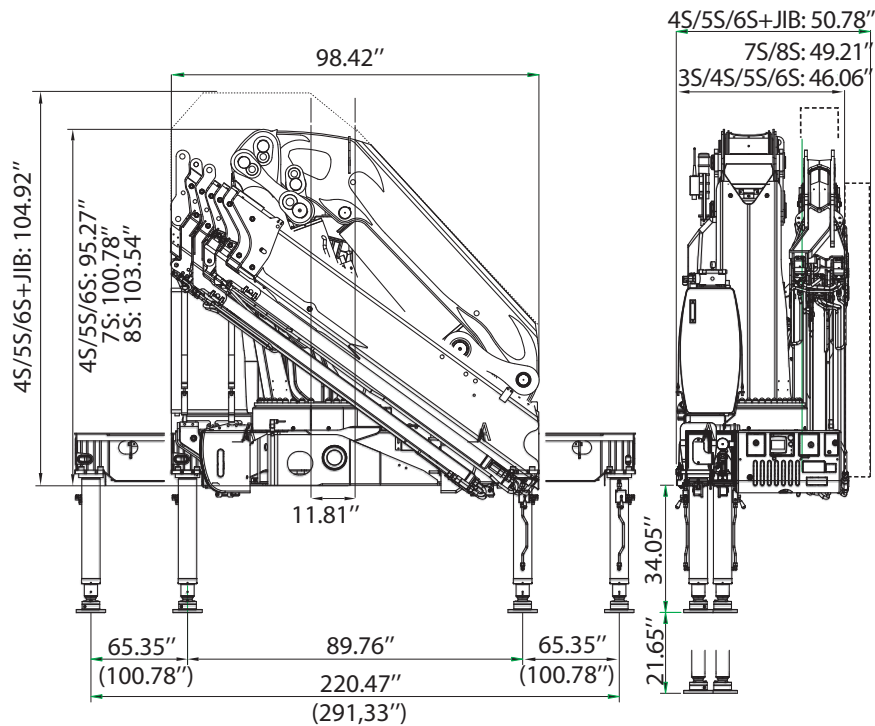

STANDARD



Hexagonal boom profile



Fly-jib articulating for more than 180°



Outer boom articulating for more than 180°



Stabilizers with hydraulic outlet



Sequence valves



Oil cooler



Slewing ring and reduction gear unit



Radio remote control with display



Progress 2.0



"Pro.Dec. System" Cylinders with progressive stop at the end of their stroke



"High Speed System" Increased speed of extension cylinders



ETL (Effer Twin Links)



Radio remote for stabilizers

OPTIONALS



Swing-up stabilizers, hydraulically activated



"Wind & Drive" Crane foldable with the jib on, without removing the winch components



Winch



Crane adjustment for crane equipped with basket



Radio remote with joystick



H Version: base version for countries outside EU. For technical specifications ask to Effer Commercial Division



DLC-S: Dynamic Load Chart



SENSE



RACE



ALTEC, INC.

210 Inverness Center Drive
Birmingham, Alabama 35242
800.958.2555
sales@altec.com | altec.com/effer

