



ENGLISH
4 SEP 2018

955


The 955 crane combines the main technological EFFER innovations both from a technical-structural point of view and in terms of safety, because it is equipped with the PROGRESS electronic control system.

The main booms of the crane and the various joints available allow operations to be performed even in environments where the available space is limited and the jib or crane hook needs be placed at a remarkable height.




RECOMMENDED LOAD DIAGRAMS


6S

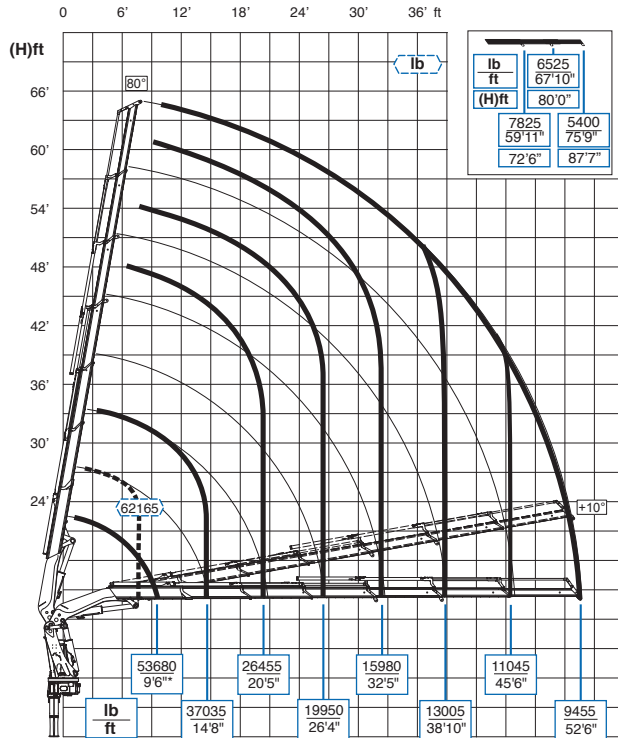


6S JIB 6S HEAVY DUTY

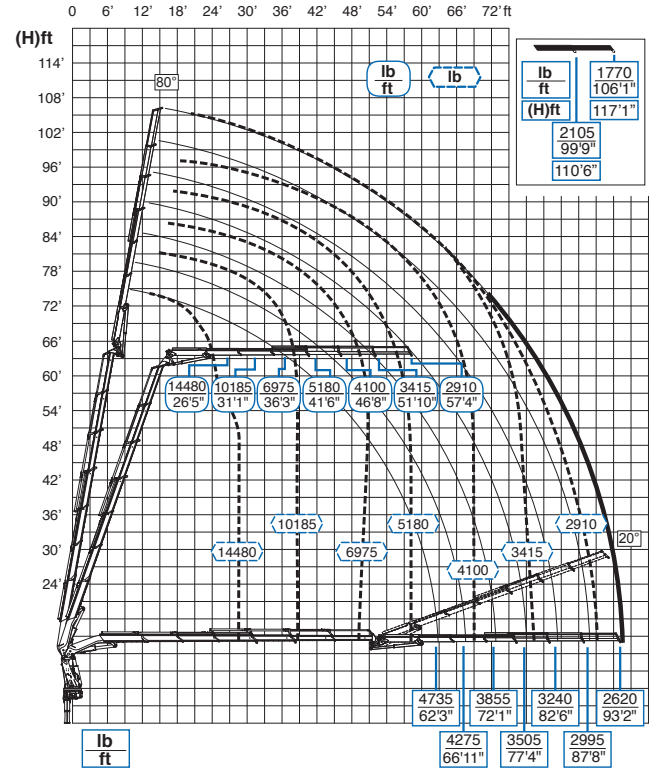


7S

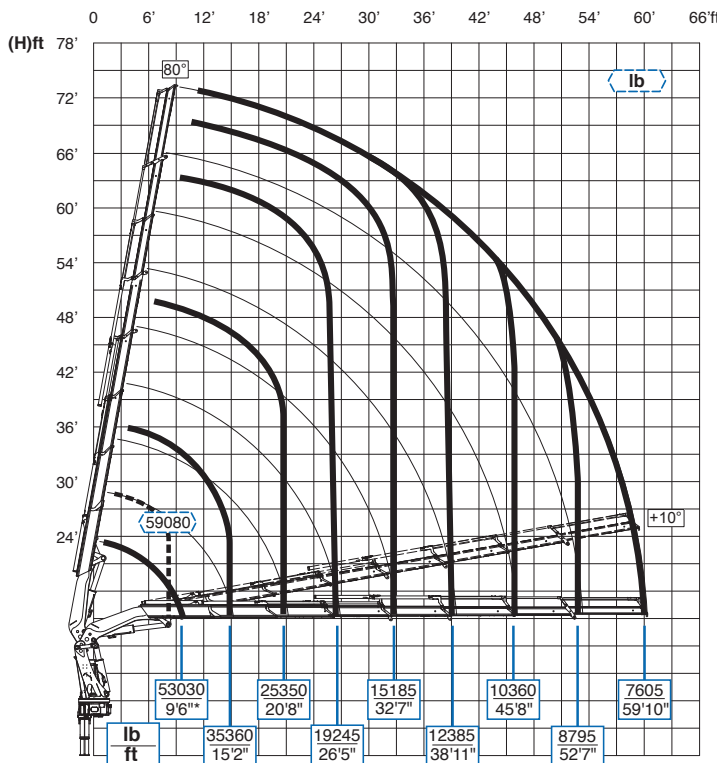


6S JIB 6S LIGHT

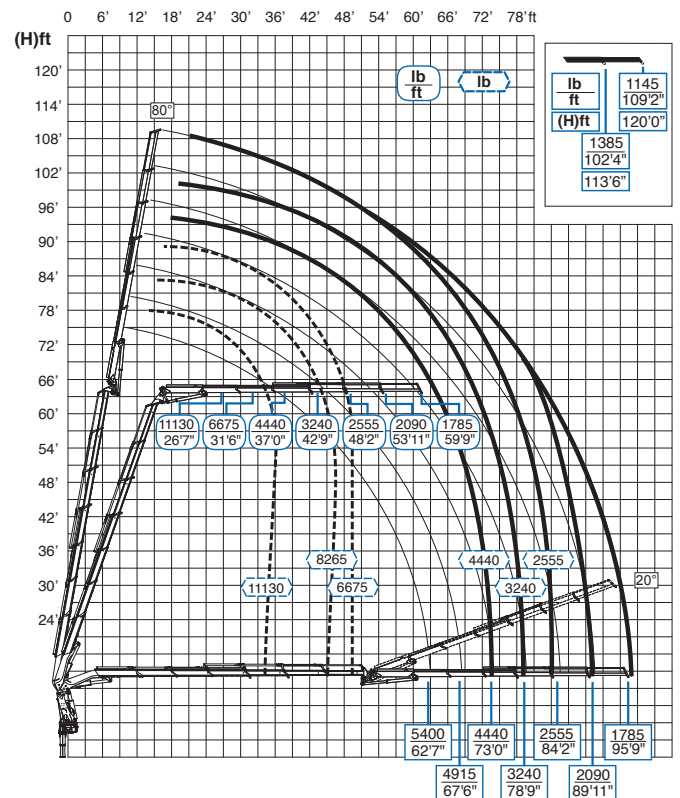


7S JIB 4S

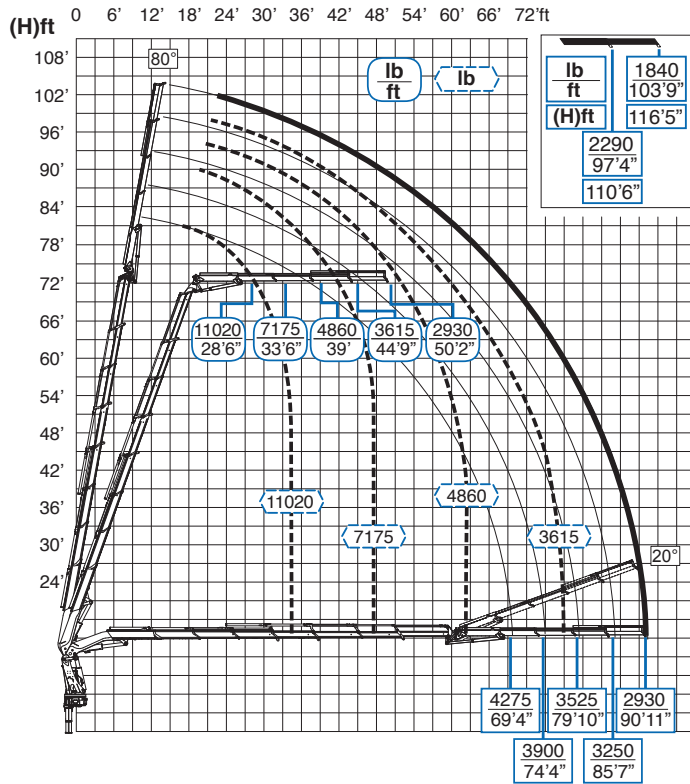


8S

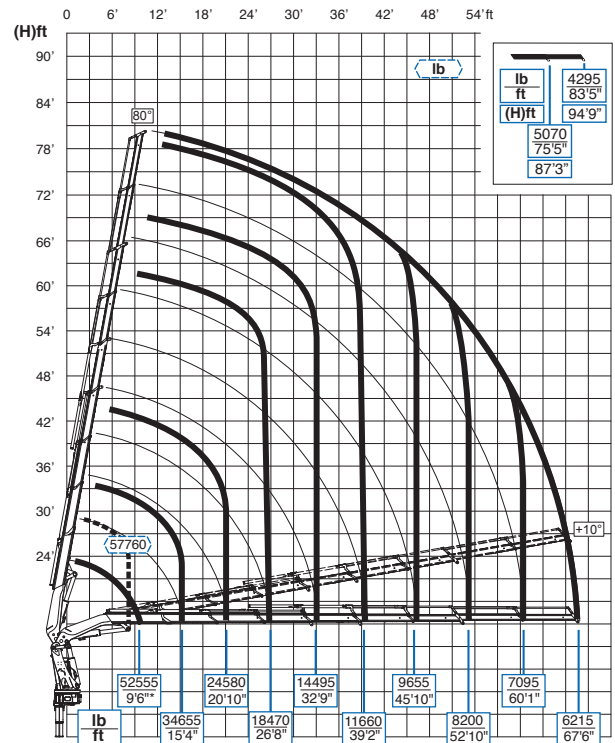


9S

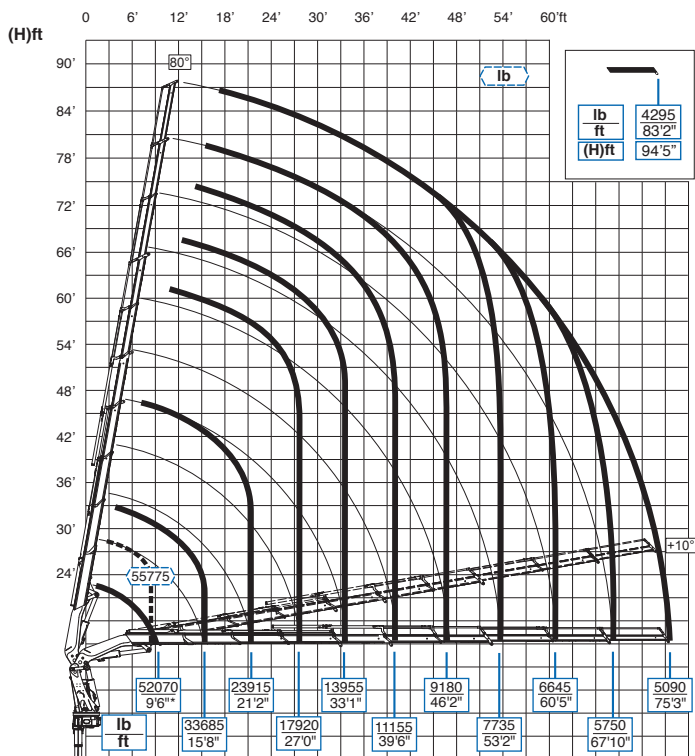

8S JIB 6S

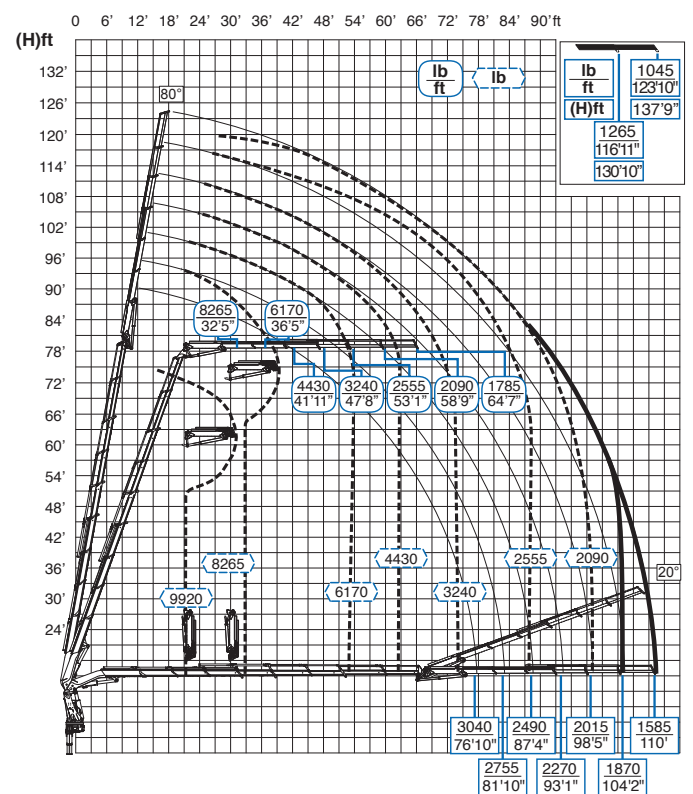


DIMENSIONS

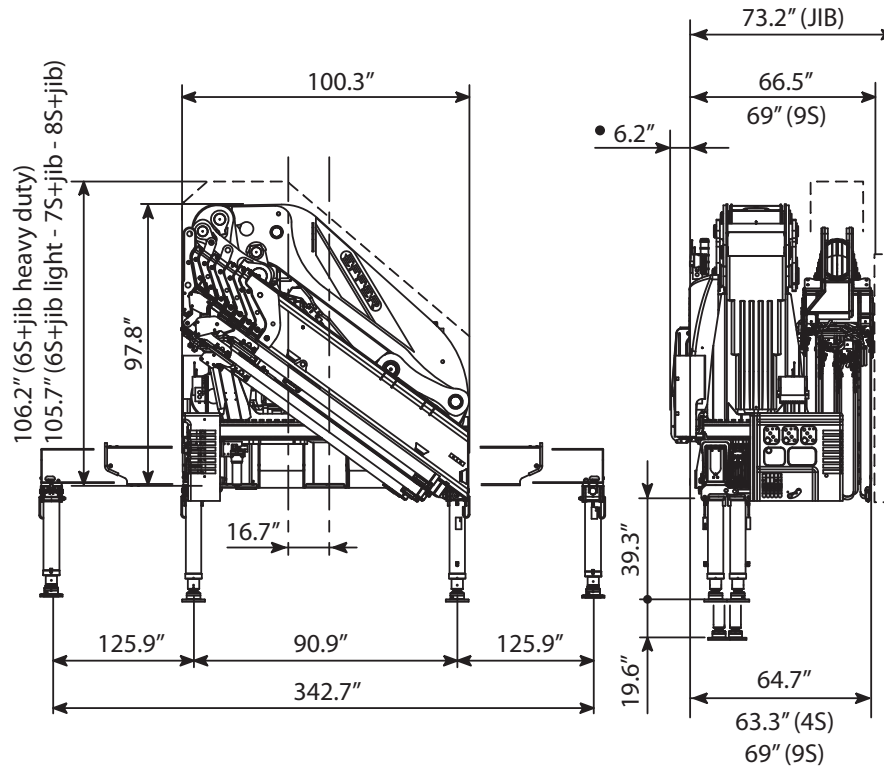


- Fitted tank size
(optional, it fits within slewing dimensions)

CroSStab

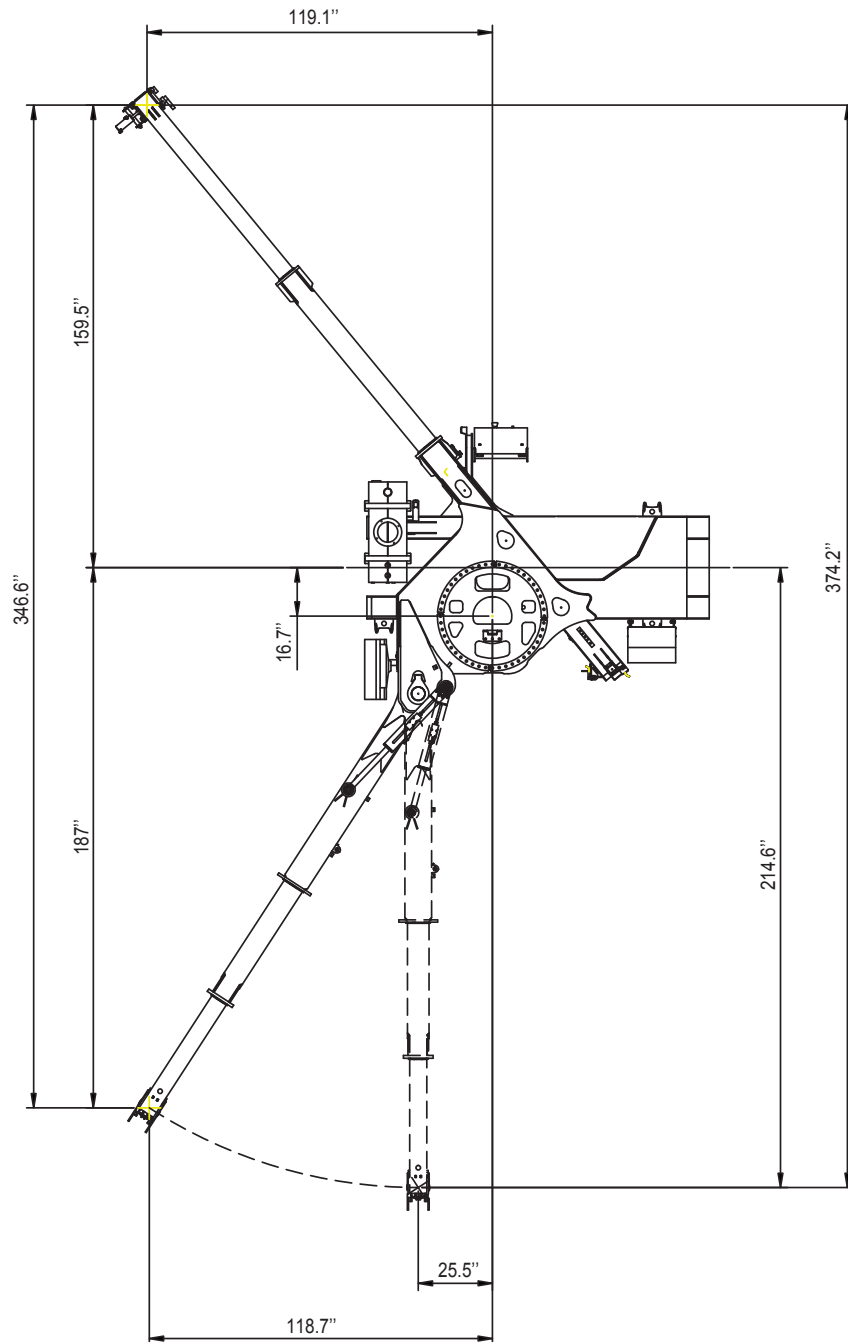

V-Stab

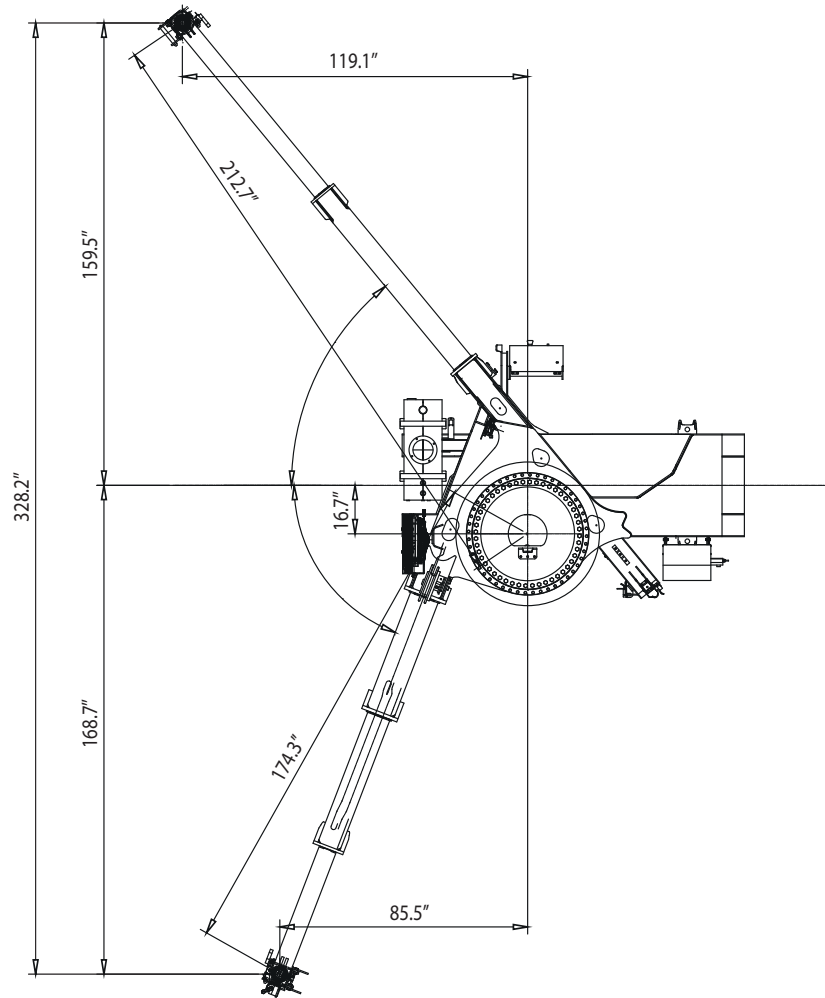

PERFORMANCE

DESCRIPTION	UNIT OF MEASURE	2S	4S	6S	7S	8S	9S
Max. hydraulic outreach	ft	26'7"	39'1"	53'4"	60'8"	68'4"	76'
Max. lifting moment (+25°)	lb*ft	583370	552840	541780	537190	533410	529430
Slewing arc	[°]	endless					
Slewing Capacity - Max slope	%	8.7					
Working pressure	p.s.i.	5583					
Max oil delivery	gpm	34.3					
Oil tank capacity	gal.	68					
Weight of the standard crane (± 2%)	lb	14405	15895	17235	17820	18450	18955

STANDARD

	Decagonal boom profile
	Slewing ring and reduction gear unit
	ETL (Effer Twin Links)
	Progress 2.0
	"High Speed System" Increased speed of extension cylinders
	"Pro.Dec. System" Cylinders with progressive stop at the end of their stroke
	Oil cooler
	Sequence valves
	Outer boom articulating for more than 180°
	Fly-jib articulating for more than 180°
	Radio remote control with display
	Stabilizers with hydraulic outlet
	Swing-up stabilizers, manually activated
	"Grip& Swing" Hook on bearing with cardan
	Radio remote for stabilizers

OPTIONALS

	Swing-up stabilizers, hydraulically activated
	"Wind & Drive" Crane foldable with the fly-jib on, without removing the winch components
	CroSStab
	Winch
	Radio remote with joystick
	Crane adjustment for crane equipped with basket
	Additional reduction gear unit
	H Version: base version for countries outside EU. For technical specifications ask to Effer Commercial Division
	Integral subframe for compact mounting
	DLC - Dynamic Load Chart
	SENSE
	V-Stab



DISTRIBUTED BY  **Altec**

ALTEC, INC.

33 Inverness Center Parkway
Birmingham, Alabama 35242
800.958.2555
sales@altec.com | altec.com/effer

