



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
 TO SPEAK WITH AN ALTEC REPRESENTATIVE
 or visit us online at altec.com

Altec | **fenex**
 UNDERGROUND UTILITY
 SUPPORT VEHICLES & TRAILERS

UST-15G-5T

FEATURES



- Underground support trailer with 15kW output gas generator and 5 ton air conditioning
- Heavy-duty steel frame construction
- Kubota gas engine with Marathon Stamford capable of 15kW single phase 120/240VAC
- Dual 20 gal fuel tanks for extended run-time
- 5 ton air conditioning that is non-recirculating with air filters
- Hubble receptacle for standby power
- L.E.D. arrowboard on telescopic mast
- Ventilation blower, two-speed, with hot water heat exchanger and 6,000W electric heater element for additional BTU output as required
- Includes 8 inch diameter, 25 ft length collapsible blower hose
- Submersible water pump, 90 GPM with 2 inch discharge (for use with jib-crane to lower down manhole / vault)
- Water pump, 280 GPM, with 3 inch discharge (hard mounted)

OPTIONS

- Manhole ring, aluminum construction
- Manhole guard rail, tubular steel construction
- Spare tire
- Caution cone storage
- Wheel chocks

TRAILER SPECIFICATIONS

- GVWR 3,500 lbs
- Single heavy-duty rated axle
- Electric brakes with emergency braking
- 7-prong RV-style electrical trailer connector

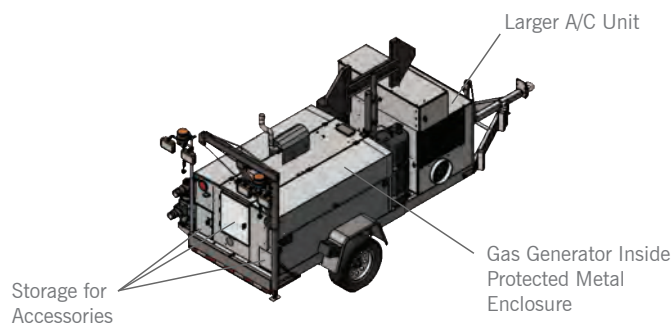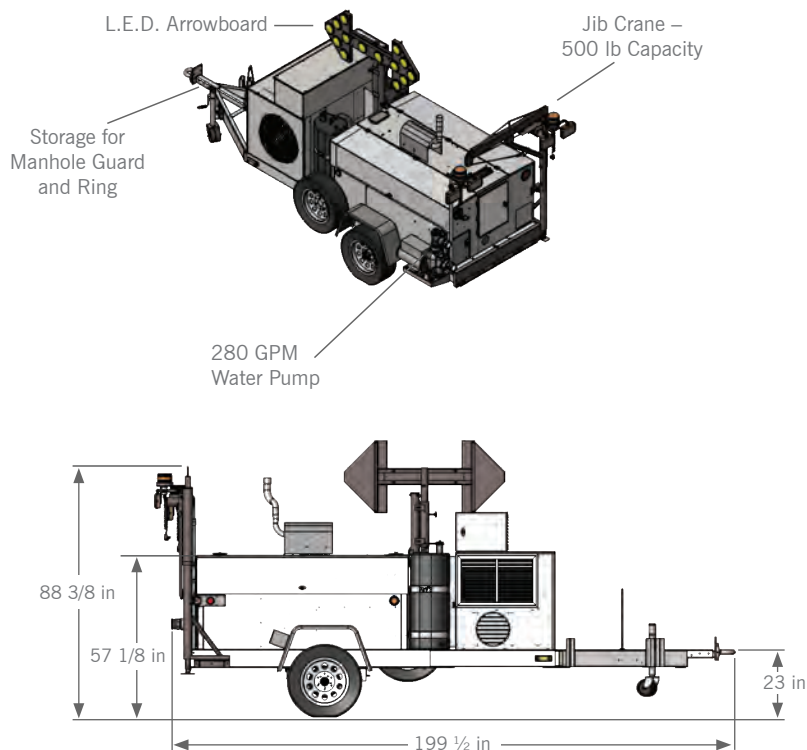

EFFICIENT STORAGE OF JOBSITE ACCESSORIES



EASY ACCESS INSIDE MAIN ENCLOSURE FOR STORAGE OR MAINTENANCE OF GENERATOR



VENTILATION SYSTEM FOR SAFE AND IMPROVED WORK ENVIRONMENT



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2025 Altec Inc. All Rights Reserved. AIOS-FENEX-UST15G5T-052725