

L42M/L45M



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
OVERCENTER MATERIAL
HANDLING AERIAL DEVICE

L42M/L45M

FEATURES

- Altec Single Handle ISO-Grip® System
- Overcenter Aerial Device with Altec Patented Walking Link
- Mechanical Platform Leveling System
- Full Pressure, Open Center Hydraulic System
- Material Handling System, 1,500 lb Maximum
- Manual Extension, Hydraulic Tilting Jib
- 400 lb Platform Capacity
- Continuous Rotation
- 24 x 30 x 42 in Platform with 90° Hydraulic Rotator
- Diagnostic Pressure Test Quick Disconnect Couplings
- Hydraulic Tool Circuit at Boom Tip
- Category C 46 kV with Lower Boom Insulator
- Automatic Throttle System
- Hydraulic Platform Tilt
- Outrigger Motion Alarm
- Outrigger/Boom Interlock System

OPTIONS

- Hydraulically Extendable Jib
- Low Stow Upper Boom
- Insulated, Category B, 46 kV
- Engine Start/Stop
- Remote Secondary Stowage System
- Multiple Platform Step Locations
- Additional Tool Circuit at Boom Tip
- Tool Circuit at Tailshelf
- Manual Throttle Control
- Lower Boom Lifting Eye


Recommended safety equipment, available through Altec Supply, include a fall protection system, platform liner, outrigger pads and wheel chocks.

CONFIGURATIONS

	L42M	L45M
Ground to Bottom of Platform	42.6 ft (13.0 m)	45.0 ft (13.7 m)
Working Height*	47.6 ft (14.5 m)	50.0 ft (15.2 m)
Maximum Side Reach:		
Upper Boom Overcenter	34.6 ft (10.5 m)	36.9 ft (11.3 m)
Upper Boom Non-overcenter	35.2 ft (10.7 m)	37.0 ft (11.3 m)
Stowed Travel Height*	11.1 ft (3.4 m)	
Platform Capacity	400 lb (181 kg)	
Material Handling Capacity:		
Minimum	500 lb (227 kg)	400 lb (181.4 kg)
Maximum	1500 lb (681 kg)	1350 lb (612.4 kg)
Isolation Gap:		
Upper Boom	141.9 in (3604 mm)	155.9 in (3960 mm)
Lower Boom	15.0 in (381 mm)	15.0 in (381 mm)
Lower Boom Articulation	0 to 125°	
Upper Boom Articulation	0 to 205°	
Rotation	Continuous	
Platform Rotation	90°	

*Based on a 40 in (1016 mm) chassis frame height.

REACH DIAGRAM

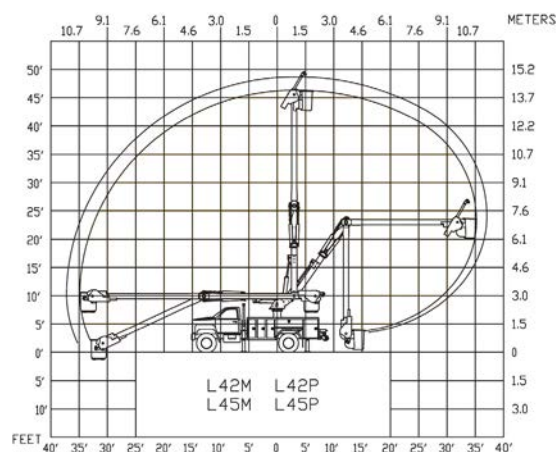

125° OF LOWER BOOM ARTICULATION ALLOWS OPERATOR TO ACCESS BINS AND THE GROUND FROM THE NON-OVERCENTER POSITION



SELECT NORMAL UPPER BOOM STOW POSITION FOR OPEN BED SPACE OR LOW STOW POSITION TO SIMPLIFY PLATFORM ACCESS



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission. © 2026 Altec Inc. All Rights Reserved. AIOS_L42-45M_0726



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM