



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
NON-INSULATING TELESCOPIC
AERIAL DEVICE

FEATURES

- Non-Insulating Two-Stage Telescopic Aerial Device
- 60 x 36 x 45 in (1524 x 914.4 x 1143 mm) Reach Through Aluminum Platform with 600 lb Capacity
- Hydraulic Self-Leveling Platform
- Quick Disconnect Platform
- 180° Platform Rotation
- Single-Handle Electric/Hydraulic Proportional Joystick Controls
- Out and Down Primary Outriggers
- Down Only Auxiliary Outriggers
- Short Jacking Option Using Rotational Interlocks on Outriggers
- Hydraulic Overload Protection System (HOP)
- Engine Start/Stop at all Control Stations
- Unit Load Indicator Gauge at Platform Controls and at Turntable Controls
- Backlit Controls at all Work Stations
- Secondary Stowage
- Emergency Stop at Upper and Lower Control Stations
- Catwalk Over Chassis Cab for Platform Access
- Outrigger Motion Alarm
- Back Up Alarm
- Truck Level Indicators
- Minimum 22,940 GVWR Chassis

SPECIFICATIONS	Ground to Bottom of Platform	44.5 ft (13.5 m)
	Working Height	49.5 ft (15.1 m)
	Maximum Reach From Centerline	43.0 ft (13.1 m)
	At Platform Height	8.2 ft (2.5 m)
	Platform Capacity	600 lb (272.2 kg)
	Lower Boom Articulation	-20° to 80°
	Stowed Travel Height*	11.5 ft (3.5 m)
	Rotation	Continuous, 360°


*Based on a chassis frame height of 32 inches (812.8 mm)

OPTIONS

- Material Handling Attachment
- 500 lb (226.8 kg) Capacity Platform Jib Winch Stowed at Platform
- 2000 lb (907.2 kg) Primary Boom Winch with Anti-Two Block Switch
- Oil Cooler
- Platform Canvas Wrap for Wind Protection
- Primary Winch Cable Compression Roller
- Weld Leads at Platform
- Welder/Generator with Remote Start/Stop
- 110V Power Source at the Platform
- Trailer Tow Packages
- Thru-Box and Underslung Boxes for Storage
- Flatbed Body Configurations with Wood, Aluminum or Steel Deck

Recommended safety features and additional accessories available through Altec Supply include a fall protection system and wheel chocks.

REACH DIAGRAM

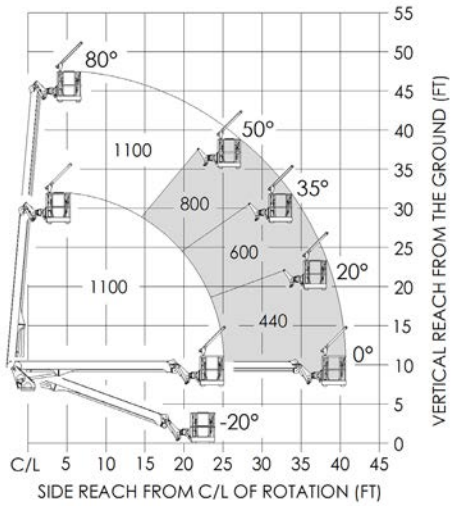

SHORT SIDE JACKING OF OUTRIGGERS



180° PLATFORM ROTATION



NEW ACCESSORIES LOCATED IN PLATFORM FOR OPERATOR PERFORMANCE & PRODUCTIVITY

Two USB charging ports at 2.1A, one 12V power adapter, two 750 lumen flood lights, a magnetic parts tray, cup holders and tool holders



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2024 Altec Inc. All Rights Reserved. AIOSSL49-0924-v1