



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

Altec
TELESCOPIC
AERIAL DEVICE

FEATURES


- Non-Insulating, Four-Stage Hydraulically Sequenced Telescopic Aerial Device
- 60 x 36 x 45 in (1,524 x 914.4 x 1,143 mm) Reach Through Aluminum Platform with 600 lb (272 kg) Capacity
- Hydraulic Self-Leveling Platform
- Quick Disconnect Platform
- 180° Platform Rotation
- Single-Handle Electric/Hydraulic Proportional Joystick Controls
- Out and Down Primary and Auxiliary Outriggers
- Outrigger Motion Alarm
- Short Jacking Option using Rotational Interlocks on Outrigger
- Hydraulic Overload Protection System (HOP)
- Emergency Power
- 360° Continuous Rotation
- Engine Start/Stop at Lower and Upper Controls
- Emergency Stop at all Control Stations
- Catwalk Over Chassis Cab for Platform Access
- Truck Level Indicators
- Back Up Alarm
- Minimum 33,000 GVWR Chassis
- ICC Bumper

OPTIONS

- Fiberglass Reach Through Platform 57 x 33 x 42 in (1448 x 838 x 1067 mm) with 600 lb (272 kg) Capacity
- Multi-Handle Proportional Controller
- 500 lb (227 kg) Capacity Platform Jib Winch
- 5900 lb (2679 kg) Primary Boom Winch with Anti-Two Block Switch
- 2000 lb (908 kg) Primary Boom Winch with Anti-Two Block Switch
- Primary Winch Cable Compression Roller
- Telescopic Platform Material Pegs with 100 lb (46 kg) Capacity
- Welder/Generator with Remote Start/Stop
- Weld Leads at the Platform
- 110v Power Source at the Platform
- Cab Guard
- Trailer Tow Packages
- Auxiliary Boxes for Storage
- Outrigger Holders
- Flatbed Body Configurations with Aluminum, Wood or Steel Deck

SPECIFICATIONS	Ground to Bottom of Platform	82.8 ft (25.3 m)
	Working Height	87.8 ft (26.8 m)
	Maximum Side Reach	62.0 ft (18.9 m)
	Platform Dimensions	60 x 36 x 45 in (1,524 x 914.4 x 1,143 mm)
	Platform Capacity	600 lb (272 kg)
	Platform Rotation	180°
	Boom Articulation	-20 to 80°
	Rotation	Continuous
Aerial Operation ANSI 92.2 Compliant Crane Operation ASME B30.5 Compliant		

REACH DIAGRAM

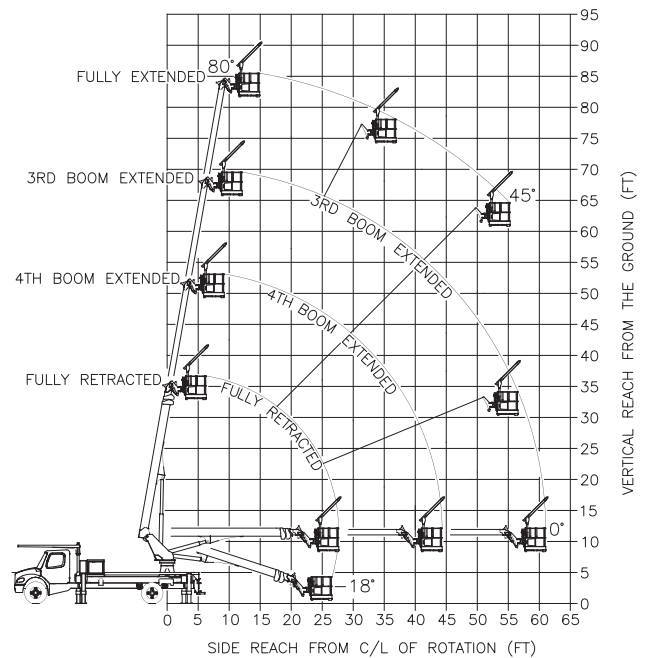

Recommended safety features and additional accessories, available through Altec Supply, include a platform liner, fall protection system, wheel chocks and outrigger pads.

2-MAN PLATFORM CAPABILITY FOR MORE PRODUCTION AND EFFICIENCY



180° PLATFORM ROTATION FOR A SAFER AND SMARTER WORK AREA



INCLUDED SHORT JACKING ALLOWS OPERATORS SAFE SET UP IN TIGHT SPOTS



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2022 Altec Inc. All Rights Reserved. AIOALS87-0622-v1

