



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
FOUR DRUM PULLER

TS40H-4P

FEATURES

- Full Operator's Station with Protective Screen and Adjustable Seat
- All Controls for Machine are Centrally Located at Operator Station
- 15,000 feet of 5/8 Synthetic Rope per Drum
- Front and Rear Hydraulic Jacks
- Pull Force up to 4,000 lbs
- Pulling Line Speed 4 mph
- Hydraulic Drum Engagement System
- 74 hp Tier 4 Final Engine
- Manual Front Jack Override
- Side Access Platforms
- Central Lube System for Drums and Arbor Bar
- Tarp Cover System for Rope Protection
- Lockable Storage Box
- 4 Grounding Locations
- Umbrella and Holder
- USB Power Outlet
- Remote Oil Drain for Ease of Service
- Battery Charging Studs and Battery Cut-Off Switch

OPTIONS


- Rope package: 22K feet of 7/16 Synthetic Rope
- Lighting Kit: perimeter ground lights and one remote controlled spotlight
- Tire inflation kit on trailer
- Roof package

Additional accessories available through Altec Supply including pulling grips, swivels, pilot line systems, and running grounds.

SPECIFICATIONS

Max Tensioning Capacity	4,000 lbs
Max Line Speed	4 mph
Torque	115,000 in-lbs at full drum
Rope Length	15,000 ft
Rope Type	Polyester, 12 strand, 5/8 in diameter
Tensile Strength	18,500 lbs
Working Load Limit	4,624 lbs
Model	Kubota V3307-T, Tier 4 Final
Power	74 HP @ rated speed, 2700 rpm
Fuel	Diesel, common rail fuel injection
DEF	Not required
Regen	Not required
Overall Length	288 in (24 ft)
Max Width	100 in (8 ft 400 in)
Travel Height	Screen up 136 in (11 ft 4 in) Screen folded 120.5 in (10 ft 0.5 in)
GVWR	29,800 lbs
GAWR	32,000 lbs
Tongue Weight	2,860 lbs
Axle Type	Tandem, Dual Tire
Axle Capacity	16,000 lbs per axle
Brakes	Electric
Tires	(8) 215/75 R17.5, 16 ply 75 mph speed rating, 4805 lb load rating
Tow Hitch	3.0 in diameter tow ring
Lighting	DOT 4 light system, 7 pin wire connector
Front jack	Hydraulic drop down
Rear jacks	(2) Hydraulic drop down, each side
Jacks Penetration	12 in

FOLD DOWN WALKWAYS PROVIDES SAFE ACCESS TO LEVELWIND/FAIRLEADS AND EASE OF SERVICE AND MAINTENANCE

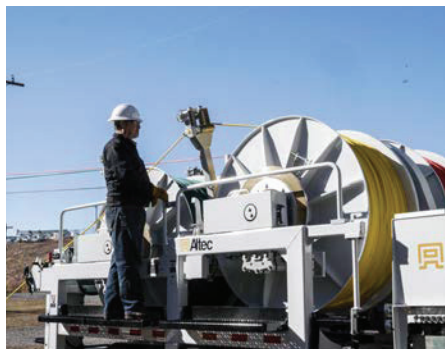

CENTRALIZED CONTROLS PROVIDE OPERATOR SAFETY



OPTIONAL ROOF PACKAGE



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2025 Altec Inc. All Rights Reserved. AIOSTS40H-4P-223-v1



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM