

TEUPEN TC/TL98SJ



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**[®]

TRACKED AERIALS

TEUPEN TC/TL98SJ

SPECIFICATIONS


PERFORMANCE

Max Working Height	98.4 ft (30 m)
Max Platform Height	91.8 ft (28 m)
Horizontal Outreach (176.3 lbs / 80 kg)	51.5 ft (15.7 m)
Horizontal Outreach (440.9 lbs / 200 kg)	45.9 ft (14 m)
Max Platform Capacity	440.9 lbs (200 kg)
Jib, Movable	180°
Platform Rotation	180°
Max Turntable Rotation	450°
To be Jacked up on Ground Slope of	16.7° / 30 %
Track drive, height and width adjustable	0.7 ft x 0.6 ft (22 cm / 17 cm)
Gradeability, Max	16.7° / 30 %
Slope Angle, Max	16.7° / 30 %
Travel Speed, Max	1.9 mph (3 kph)

WEIGHT*

Total Weight	9,424.8 lbs (4,275 kg)
Live Load in Traveling Position	79.6 psf (3.8 kN/m²)
Live Load in Working Position	36.9 psf (1.7 kN/m²)
Point Load per Outrigger Plate, Max	5,845 lbf (26 kN)

WORKING ENVELOPE

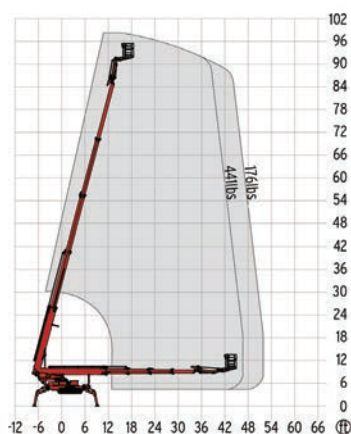

EN ISO 9001



ANSI/SIA A92.20

MEASUREMENTS*

Platform Height (A)	3.6 ft (1.1 m)
Platform Length (B)	3.9 ft (1.2 m)
Platform Width (C)	2.6 ft (0.8 m)
Length (D)	23.6 ft (7.2 m)
Height (F)	6.5 ft (1.9 m)
Width, min. (G)	5.2 ft (1.5 m)
Max Ground Clearance (H)	4.1 ft (1.2 m)
Track (length x width) (I)	6.3 ft x 0.8 ft (1.9 m x 0.2 m)
Stabilizer footprint both sides wide (length) (J)	17.4 ft (5.3 m)
Stabilizer footprint both sides wide (width) (K)	15.6 ft (4.7 m)
Stabilizer footprint one side narrow (length) (L)	21.8 ft (6.6 m)
Stabilizer footprint one side narrow (width) (M)	13 ft (3.9 m)
Stabilizer footprint both sides narrow (width) (N)	9.8 ft (2.9 m)
Stabilizer plate (length x width)	1 ft x 0.7 ft (0.3 m x 0.2 m)


POWER SUPPLY

Electric Current, Max	115 V / 13 A
-----------------------	--------------

POWER SOURCES

Standard Power Sources	
Electric (TL98SJ)	115 V
Diesel (TC98SJ)	Kubota D902-E (16.1 kW / 21.9 hp)
Optional Power Source	Battery: 80 V
Fuel tank capacity (Diesel Engine)	10.5 gal (40 L)

* Weight and dimensions may vary depending on options and accessories

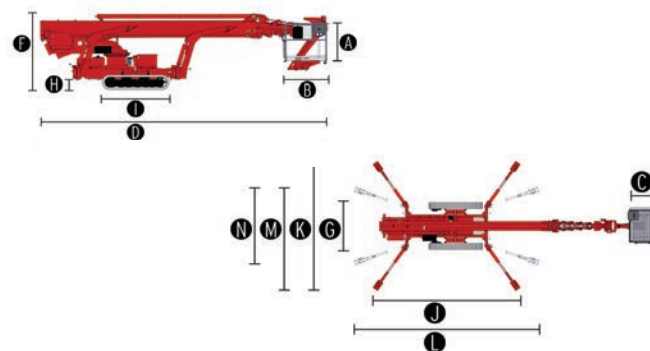

For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2026 Altec Inc. All Rights Reserved. Altec_TCTL98SJ_SBM_042926



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM