

TEUPEN TL98SJplus



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
TRACKED AERIALS

TEUPEN TL98SJ^{plus}

SPECIFICATIONS

PERFORMANCE


Max Working Height 661.3 lbs / 881.8 lbs (300 kg / 400 kg)	98.4 ft / 88.5 ft (30 m / 27 m)
Max Working Height (both sides narrow)	82 ft (25 m)
Max Platform Height 661.3 lbs / 881.8 lbs (300 kg / 400 kg)	91.8 ft / 82 ft (28 m / 25 m)
Max Platform Height (both sides narrow)	75.4 ft (23 m)
Max Platform Height (one side narrow)	82 ft (25 m)
Max Horizontal Outreach (881.8 lbs / 400 kg)	41.6 ft (12.7 m)
Max Horizontal Outreach (661.3 lbs / 300 kg)	45.9 ft (14 m)
Max Horizontal Outreach (308.6 lbs / 140 kg)	52.5 ft (16 m)
Max Horizontal Outreach (both sides narrow)	47.5 ft (14.5 m)
Max Platform Capacity	881.8 lbs (400 kg)
Max Platform Capacity (both sides narrow)	551.1 lbs (250 kg)
Jib, Movable	180°
Platform Rotation	180°
Max Turntable Rotation	450°
To be Jacked up on Ground Slope of	16.7° / 30 %
Track drive, height and width adjustable	9.4 in / 8.6 in (24 cm / 22 cm)
Gradeability, Max	16.7° / 30 %
Slope Angle, Max	21° / 38 %
Travel Speed, Max	1.8 mph (3 kph)

POWER SOURCES

Standard Power Sources	
Electric (TL98SJ ^{plus})	115 V, 20 A, 1.6 kW
Diesel (TC98SJ ^{plus})	Kubota D902 (16.1 kW / 21.9 hp)
Fuel tank capacity (Diesel Engine)	10.3 gal (39 L)
Optional Power Source	
Battery drive (AGM)	80 V

POWER SUPPLY

Electric Current, Max	115 V / 20 A
-----------------------	--------------

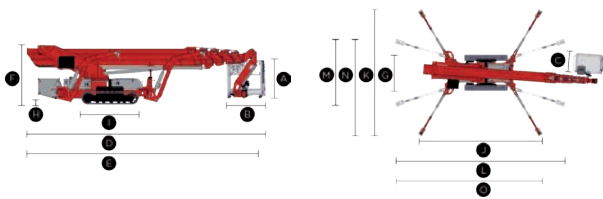

MEASUREMENTS*


Platform Height (A)	3.6 ft (1.1 m)
Platform Length (B)	3.9 ft (1.2 m)
Platform Width (C)	2.6 ft (0.8 m)
Length (D)	25.2 ft (7.7 m)
Length without platform (E)	24.6 ft (7.5 m)
Height (F)	6.4 ft (1.9 m)
Width, min. (G)	5.1 ft (1.5 m)
Max Ground Clearance (H)	1.4 ft (0.4 m)
Track (length x width) (I)	6.2 ft x 0.8 ft (1.9 m x 0.2 m)
Stabilizer footprint both sides wide (length) (J)	18 ft (5.5 m)
Stabilizer footprint both sides wide (width) (K)	18.3 ft (5.6 m)
Stabilizer footprint one side narrow (length) (L)	24.7 ft (7.5 m)
Stabilizer footprint one side narrow (width) (M)	9.8 ft (2.9 m)
Stabilizer footprint both sides narrow (width) (N)	14.1 ft (4.3 m)
Stabilizer footprint both front or back narrow (length) (O)	21.4 ft (6.5 m)
Stabilizer plate (length x width)	1 ft x 0.7 ft (0.3 m x 0.2 m)

WEIGHT*

Total Weight	10,031 lbs (4,550 kg)
Live Load in Traveling Position	75.1 psf (3.6 kN/m²)
Live Load in Working Position	37.8 psf (1.8 kN/m²)
Point Load Per Outrigger Plate, Max	7,193.8 lbf (32 kN)

* Weight and dimensions may vary depending on options and accessories

WORKING ENVELOPE

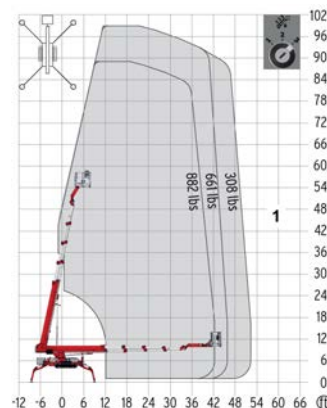

EN ISO 9001



ANSI/SIA A92.20

For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2026 Altec Inc. All Rights Reserved. Altec_TeupenTL98SJplus_SBM_033126



NEW EQUIPMENT SALES | 800.958.2555 | SALES@ALTEC.COM | ALTEC.COM