



FOR NEW EQUIPMENT SALES, CALL
800.958.2555
TO SPEAK WITH AN ALTEC REPRESENTATIVE
or visit us online at altec.com

 **Altec**
NON-OVERCENTER
AERIAL

A-CLASS

FEATURES

- Working Height Up To 97.9 ft (29.8 m)
- Side Reach Up To 46.5 ft (14.2 m)
- Continuous Rotation
- Lower Boom Isolation
- Hydraulic Platform Tilt
- Automatic Upper Boom Stow
- Outrigger Motion Alarm
- Outrigger Boom Interlock System
- Insulated, ANSI Category C, 46kV And Below
- Back Up Alarm
- Altec ISO-Grip® Control System
- Dual Hydraulic Tool Circuits at Platform with Adjustable Pressure and Flow


OPTIONS

- Material Handling
- Engine Start/Stop
- Secondary Stowage System
- ANSI, Category A, 345 kV, 500kV
- Lanyard Interlock/Alarm Available on Select Platform Configurations

Recommended safety equipment, available through Altec Supply, include a fall protection system and wheel chocks for stationary set-ups.

REACH DIAGRAM

A77T-E93

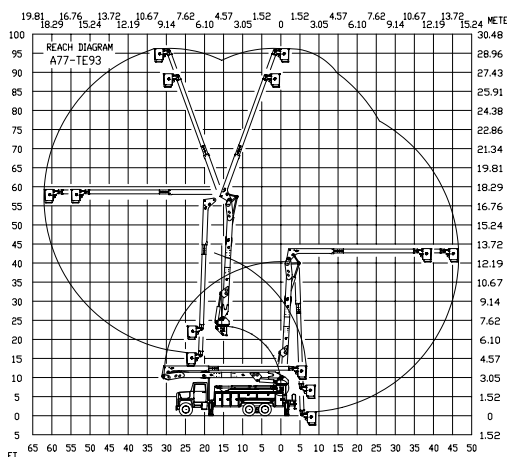

CONFIGURATIONS

CONFIGURATIONS		A72T	A77T	A72T-E88	A77T-E93
SPECIFICATIONS	Ground to Bottom of Platform*	71.7 ft (21.9 m)	76.5 ft (23.3 m)	88.1 ft (26.9 m)	92.9 ft (28.3 m)
	Working Height*	76.7 ft (23.4 m)	81.5 ft (24.8 m)	93.1 ft (28.4 m)	97.9 ft (29.8 m)
	Maximum Reach	43.9 ft (13.4 m)	46.5 ft (14.2 m)	43.4 ft (13.2 m)	46.0 ft (14.0 m)
	Stowed Travel Height*	12.5 ft (3.8 m)	12.5 ft (3.8 m)	13.0 ft (4.0 m)	13.0 ft (4.0 m)
	Material Handling Capacity, Maximum	2000 lb (907 kg)	2000 lb (907 kg)	2000 lb (907 kg)	2000 lb (907 kg)
	Platform Capacity, Maximum	800 lb (362.9 kg)	800 lb (362.9 kg)	800 lb (362.9 kg)	800 lb (362.9 kg)
	Boom Articulation				
	Upper	165°	165°	165°	165°
	Lower	93°	93°	93°	93°
	Elevator	N/A		0 to 90°	
Rotation	Continuous				
* Based on a 40 in (1016 mm) chassis frame height					

1000 LBS JIB CAPACITY AT MAXIMUM REACH



ISO-Grip® CONTROL SYSTEM HAS A HIGH ELECTRICAL RESISTANCE CONTROLLER OFFERING LIMITED SECONDARY DIELECTRIC PROTECTION FOR THE OPERATOR



For more complete information on Altec products and services, visit us on the web at www.altec.com. Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.
© 2023 Altec Inc. All Rights Reserved. AIOCLASSNONOC-1023-v1



NEW EQUIPMENT SALES

| 800.958.2555

| SALES@ALTEC.COM

| ALTEC.COM